
## AVERMEDIA, INC. **AVER MOVIEMATE**

Video/Audio card

Category Video Types Supported Video Processor XVGA Unidentified Highest Resolution Supported
Data Bus Type
Memory Type 1024 x 768 16-bit ISA N/A Maximum Onboard Memory N/A

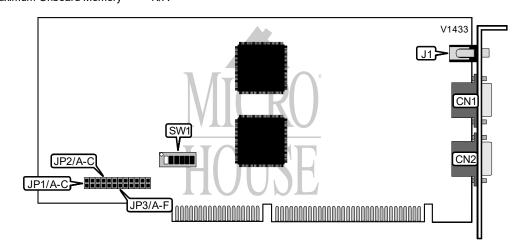

CONNECTIONS					
Purpos :	Location	Purpos :	Location		
15-pin analog video port - in	CN1	Line out	J1		
15-pin analog video port - out	CN2				

DMA CHANNEL SELECTION						
DMA	JP1/A	JP1/B	JP1/C	JP2/A	JP2/B	JP2/C
í Disabled	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Closed
6	Open	Closed	Open	Open	Closed	Open
7	Closed	Open	Open	Closed	Open	Open

INTERRUPT SELECTION						
IRQ	JP3/A	JP3/B	JP3/C	JP3/D	JP3/E	JP3/F
í 15	Open	Open	Open	Open	Open	Closed
5	Open	Closed	Open	Open	Open	Open
7	Closed	Open	Open	Open	Open	Open
10	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Closed	Open

Continued on next page . . .

## AVERMEDIA, INC. AVER MOVIEMATE

...continued from previous page

	BASE I/O ADDRESS SELECTION				
Address	SW1/3	SW1/4	SW1/5	SW1/6	
í 210h	On	On	On	Off	
200h	On	On	On	On	
220h	On	On	Off	On	
230h	On	On	Off	Off	
240h	On	Off	On	On	
250h	On	Off	On	Off	
260h	On	Off	Off	On	
270h	On	Off	Off	Off	
280h	Off	On	On	On	
290h	Off	On	On	Off	
2A0h	Off	On	Off	On	
2B0h	Off	On	Off	Off	
2C0h	Off	Off	On	On	
2D0h	Off	Off	On	Off	
2E0h	Off	Off	Off	On	
2F0h	Off	Off	Off	Off	

FACTORY CONFIGURED - DO NOT ALTER				
Switch	Position			
SW1/1	Off			
SW1/2	On			