
MULTIBEST INDUSTRIAL & MANUFACTURING, INC. M B 3 8 6 5

Processor 80386DX	
Processor Speed 20/25/33MHz	
Chip Set VLSI	
Max. Onboard DRAM 32MB	
Cache None	
BIOS Quadtel	
Dimensions 330.2mm x 218.4mm	
I/O Options 32-bit external memory card slo	t
NPU Options 80387/3167	

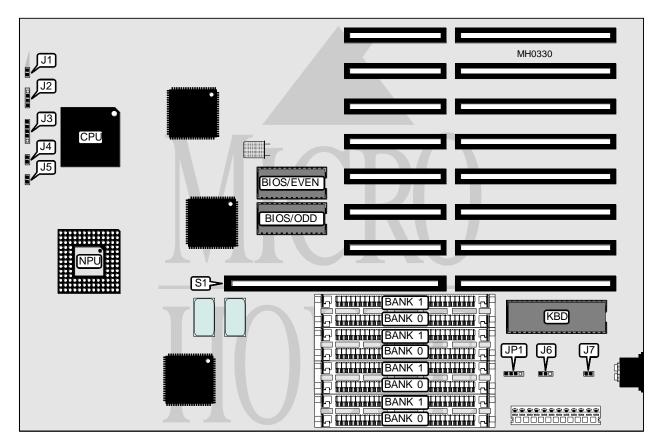

CONNECTIONS				
Purpose	Location	Purpose	Location	
Reset switch	J1	Turbo switch	J5	
Speaker	J2	External battery	JP1	
Power LED & keylock	J3	32-bit external memory card	S1	
Turbo LED	J4			

Continued on next page . . .

MULTIBEST INDUSTRIAL & MANUFACTURING, INC. M B 3 8 6 5

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Battery select external	JG	pins 1 & 2 closed		
Battery select internal	JG	pins 2 & 3 closed		
í Monitor type select color	J7	Closed		
Monitor type select monochrome	J7	Open		

DRAM CONFIGURATION					
Size	Bank 0	Bank 1			
1MB	(4) 256K x 9	NONE			
2MB	(4) 256K x 9	(4) 256K x 9			
4MB	(4) 1M x 9	NONE			
5MB	(4) 1M x 9	(4) 256K x 9			
8MB	(4) 1M x 9	(4) 1M x 9			
16MB	(4) 4M x 9	NONE			
17MB	(4) 4M x 9	(4) 256K x 9			
20MB	(4) 4M x 9	(4) 1M x 9			
32MB	(4) 4M x 9	(4) 4M x 9			