


UNIDENTIFIED

386SX-25

Processor	80386SX
Processor Speed	25MHz
Chip Set	Unidentified
Max. Onboard DRAM	16MB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

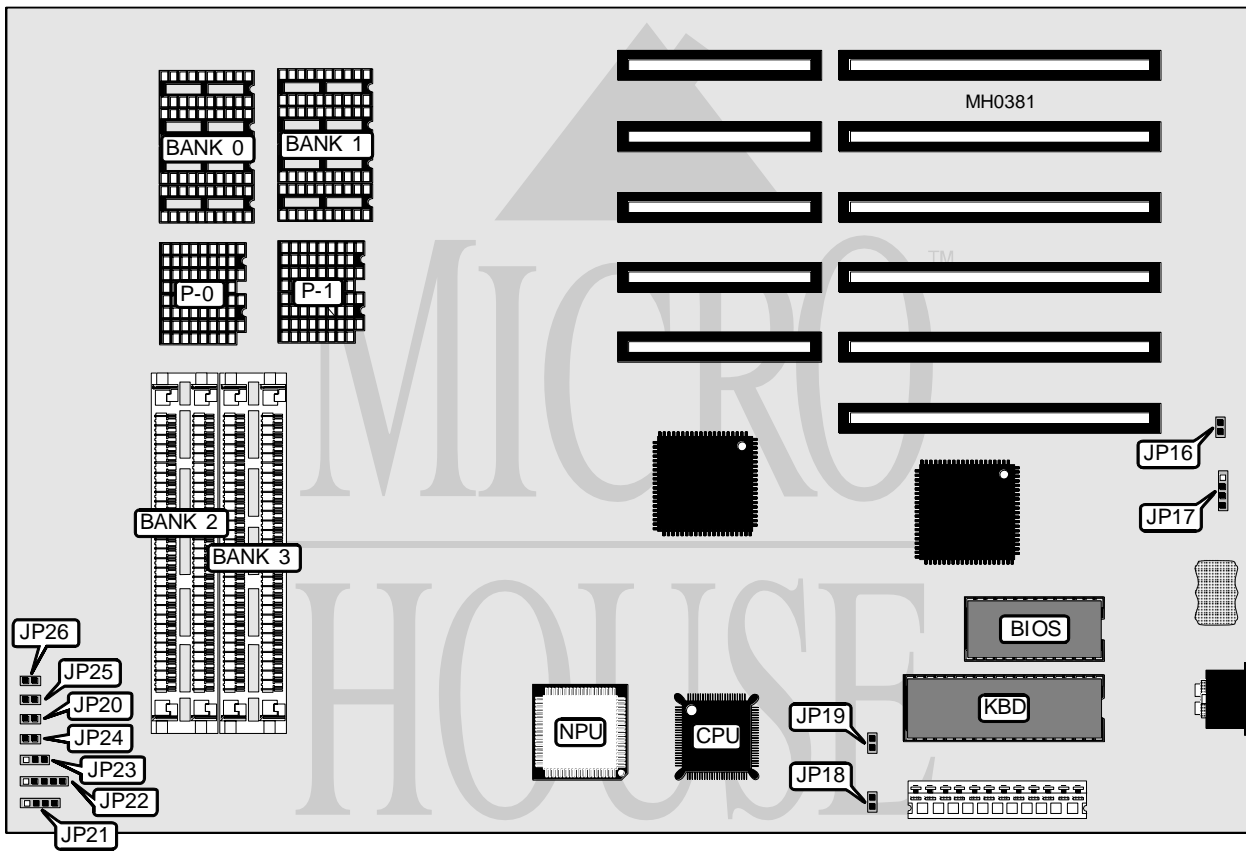

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP17	Turbo switch	JP24
Speaker	JP21	Turbo LED	JP25
Power LED & keylock	JP22	Reset switch	JP26

Continued on next page . . .

UNIDENTIFIED

386SX-25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP16	Open
CMOS memory clear	JP16	Closed
í Monitor type select color	JP18	Closed
Monitor type select monochrome	JP18	Open
í Floppy drive current select (24mA)	JP19	Closed
Floppy drive current select (12mA)	JP19	Open
í Pipeline mode enabled	JP20	Closed
Pipeline mode disabled	JP20	Open
í NPU disabled	JP23	pins 2 & 3 closed
NPU enabled	JP23	pins 1 & 2 closed

DRAM CONFIGURATION						
Size	Bank 0	P-0	Bank 1	P-1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	(4) 441000	(2) 411000	NONE	NONE	NONE	NONE
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	(4) 441000	(2) 411000	(4) 441000	(2) 411000	NONE	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9
8MB	NONE	NONE	NONE	NONE	(2) 4M x 9	NONE
16MB	NONE	NONE	NONE	NONE	(2) 4M x 9	(2) 4M x 9