


EAGLE TECHNOLOGY
NE1000 (ASSEMBLY #950-054401)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear Bus
Wiring Type RG--58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

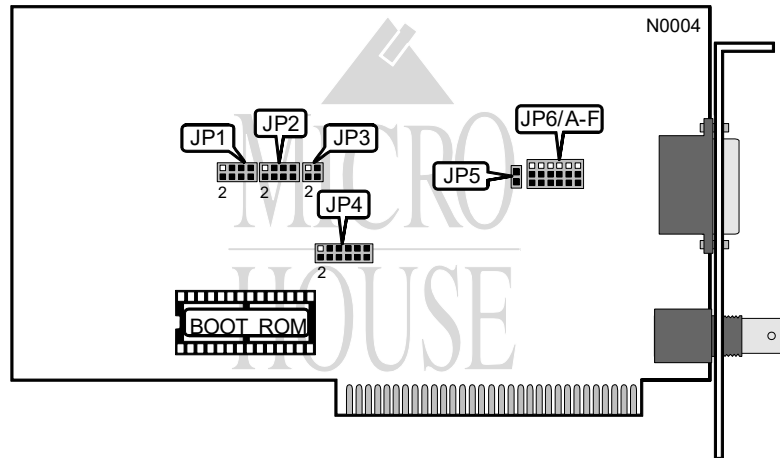

INTERRUPT REQUEST	
IRQ	JP1
2	Pins 1 & 2 closed
i3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed

DMA CHANNEL	
Channel	JP2
iDisabled	Open
DMA1	Pins 1 & 2, 5 & 6 closed
DMA3	Pins 3 & 4, 7 & 8 closed

I/O BASE ADDRESS	
Address	JP3
i300h	Pins 1 & 2, 3 & 4 closed
320h	Pins 3 & 4 closed
340h	Pins 1 & 2 closed
360h	Open

Continued on next page . . .

EAGLE TECHNOLOGY

NE1000 (ASSEMBLY #950-054401)

... continued from previous page

BOOT ROM	
Setting	JP5
iDisabled	Open
Enabled	Closed

BOOT ROM ADDRESS					
Address	JP4 pins 1 & 2	JP4 pins 3 & 4	JP5 pins 5 & 6	JP4 pins 7 & 8	JP4 pins 9 & 10
C0000h	Closed	Closed	Closed	Closed	Closed
C2000h	Open	Closed	Closed	Closed	Closed
C4000h	Closed	Open	Closed	Closed	Closed
C6000h	Open	Open	Closed	Closed	Closed
iC8000h	Closed	Closed	Open	Closed	Closed
CA000h	Open	Closed	Open	Closed	Closed
CC000h	Closed	Open	Open	Closed	Closed
CE000h	Open	Open	Open	Closed	Closed
D0000h	Closed	Closed	Closed	Open	Closed
D2000h	Open	Closed	Closed	Open	Closed
D4000h	Closed	Open	Closed	Open	Closed
D6000h	Open	Open	Closed	Open	Closed
D8000h	Closed	Closed	Open	Open	Closed
DA000h	Open	Closed	Open	Open	Closed
DC000h	Closed	Open	Open	Open	Closed
DE000h	Open	Open	Open	Open	Closed
E0000h	Closed	Closed	Closed	Closed	Open
E2000h	Open	Closed	Closed	Closed	Open
E4000h	Closed	Open	Closed	Closed	Open
E6000h	Open	Open	Closed	Closed	Open
E8000h	Closed	Closed	Open	Closed	Open
EA000h	Open	Closed	Open	Closed	Open
EC000h	Closed	Open	Open	Closed	Open
EE000h	Open	Open	Open	Closed	Open
F0000h	Closed	Closed	Closed	Open	Open
F2000h	Open	Closed	Closed	Open	Open

CABLE TYPE	
Type	JP6/A-F
iRG--58A/U 50ohm coaxial	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Pins 1 & 2 Closed