


DIGITAL EQUIPMENT CORPORATION  
DEC ETHERWORKS MC\_TP/BNC

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	32-bit MCA
<b>Topology</b>	Star
	Linear Bus
<b>Wiring Type</b>	Shielded/Unshielded twisted pair
	RG-58A/U 50ohm coaxial
<b>Boot ROM</b>	Available

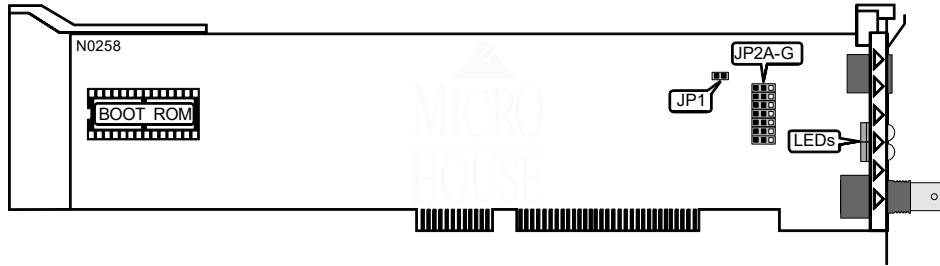

CABLE TYPE		
Type	JP1	JP2A - JP2G
i RG-58A/U 50ohm coaxial	N/A	Pins 2 & 3 Closed
Shielded/Unshielded twisted pair (10Base-T standard)	Open	Pins 1 & 2 Closed
Shielded Twisted Pair (non 10Base-T networks)	Closed	Pins 1 & 2 Closed

DIAGNOSTIC LED(S)		
Color	Status	Condition
Amber	On for 20 sec., then off	Card is performing a self-test
Amber	On	Fault has occurred, displays error code on screen.
Green	Blinking	Data is being received
Green	Off	Data is not being received

MISCELLANEOUS NOTES
Software that is supplied with the card must be run in order to fully configure it.