


EAGLE TECHNOLOGY
NE 2100

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus
Wiring Type RG--58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Available

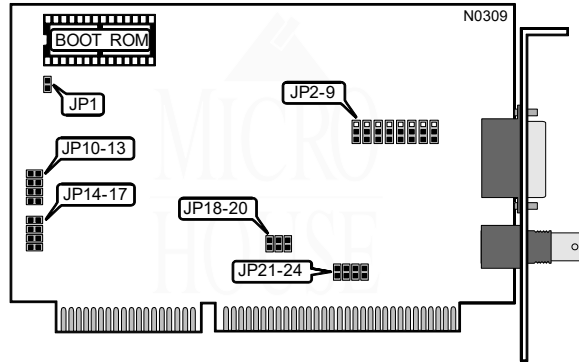

WAIT STATE	
Setting	JP1
i0 wait states	Open
1 wait state	Closed
Note: Systems using 80ns or faster memory may need to enable one wait state.	

CABLE TYPE	
Type	JP2-JP9
RG--58A/U 50ohm coaxial	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 1 & 2 closed

DMA CHANNEL								
Channel	JP10	JP11	JP12	JP13	JP14	JP15	JP16	JP17
DMA3	Closed	Open	Open	Open	Closed	Open	Open	Open
iDMA5	Open	Closed	Open	Open	Open	Closed	Open	Open
DMA6	Open	Open	Closed	Open	Open	Open	Closed	Open
DMA7	Open	Open	Open	Closed	Open	Open	Open	Closed

BOOT ROM	
Setting	JP18
iDisabled	Open
Enabled	Closed

Continued on next page . . .

... continued from previous page

BASE I/O AND BOOT ROM ADDRESS			
Address	Boot ROM	JP19	JP20
1300h	C8000h	Closed	Closed
320h	CC000h	Closed	Open
340h	D0000h	Open	Closed
360h	D4000h	Open	Open

INTERRUPT REQUEST				
IRQ	JP21	JP22	JP23	JP24
2/9	Open	Open	Open	Closed
13	Open	Open	Closed	Open
4	Open	Closed	Open	Open
5	Closed	Open	Open	Open