ADVANCED LOGIC RESEARCH, INC.


PC/2 286 M/B

Processor 80286 **Processor Speed** 8MHz C & T **Chip Set** Max. Onboard DRAM 1MB Cache None **BIOS** Phoenix

Dimensions 330mm x 218mm

I/O Options Floppy drive interface, serial port

NPU Options 80287

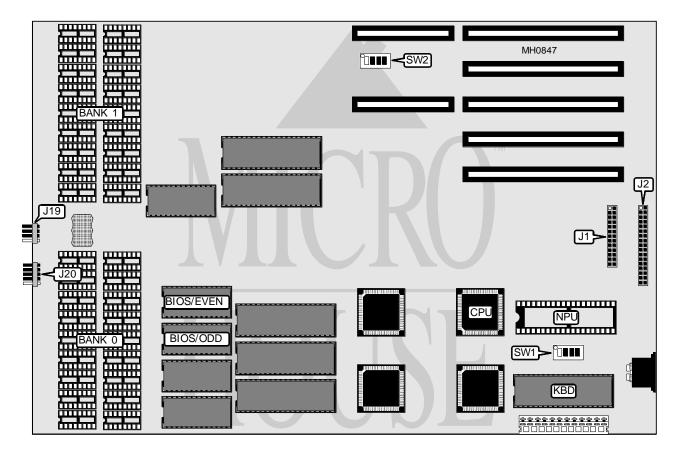

CONNECTIONS					
Purpose	Location	Purpose	Location		
Serial port	J1	Speaker	J19		
Floppy drive port	J2	Power LED & keylock	J20		

Continued on next page . . .

ADVANCED LOGIC RESEARCH, INC. PC/2 286 M/B

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Switch	Position		
í Monitor type select monochrome	SW1/3	Off		
Monitor type select color	SW1/3	On		
í Floppy drive interface enabled	SW1/4	Off		
Floppy drive interface disabled (expansion card installed)	SW1/4	On		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
512KB	(18) 41256	NONE		
1MB	(18) 41256	(18) 41256		

DRAM SWITCH CONFIGURATION				
Size	SW1/2			
512KB	On	Off		
1MB	Off	Off		

SERIAL PORT CONFIGURATION					
Setting	SW2/1	SW2/2	SW2/3	SW2/4	
COM1 (IRQ4)	On	Off	Off	Off	
COM2 (IRQ3)	Off	On	Off	On	
Disabled	Off	Off	On	N/A	