


Chapter 5: Jumper Settings
GVC TECHNOLOGIES, INC.
16-BIT 10BASE2

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus
Wiring Type AUI Transceiver via DB-15 port
 RG-58A/U 50ohm coaxial
 RG-58C/A
Boot ROM Available

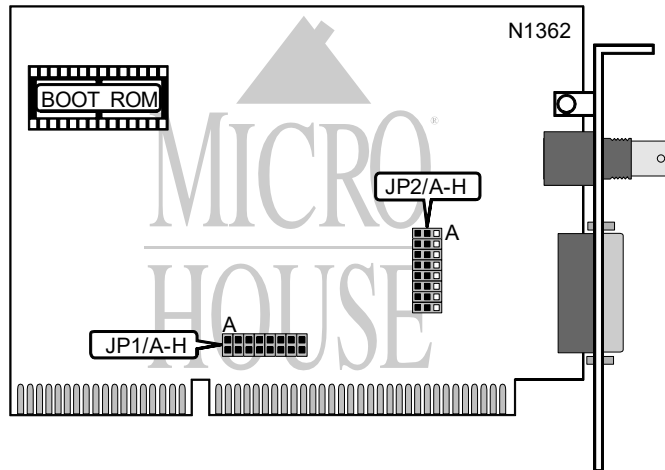

BOOT ROM CONFIGURATION	
Setting	JP1/A
Enabled	Closed
í Disabled	Open

ADDRESS SELECTION			
Base I/O Address	Boot ROM Address	JP1/B	JP1/C
300h	C800h	Closed	Closed
320h	CC00h	Open	Closed
340h	D000h	Closed	Open
360h	D400h	Open	Open

WAIT STATE CONFIGURATION	
Wait states	JP1/D
Enabled	Closed
í Disabled	Open

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
GVC TECHNOLOGIES, INC.
16-BIT 10BASE2

... continued from previous page.

INTERRUPT SELECTION				
IRQ	JP1/E	JP1/F	JP1/G	JP1/H
3	Closed	Open	Open	Open
4	Open	Closed	Open	Open
5	Open	Open	Closed	Open
9	Open	Open	Open	Closed

CABLE TYPE SELECTION								
Cable Type	JP2/A	JP2/B	JP2/C	JP2/D	JP2/E	JP2/F	JP2/G	JP2/H
AUI Transceiver via DB-15 port	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
RG-58A/U 50ohm coaxial	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated should be in the closed position.