


Chapter 5: Jumper Settings
BOCA RESEARCH, INC.
BOCALANCARD-100/10 (BE100/10)

NIC Type Ethernet
Transfer Rate 10/100Mbps
Data Bus PCI
Topology Star
Wiring Type Unshielded twisted pair/Shielded twisted pair
Boot ROM Not available

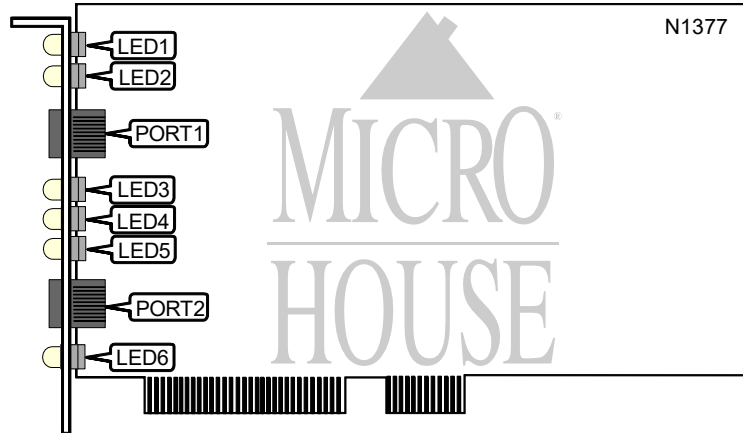

CONNECTIONS			
Purpose	Location	Purpose	Location
100Mbps port	PORT 1	10Mbps port	PORT 2

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	100Base-T network connection is good
LED1	Blinking	Data is being received at 100Mbps
LED1	Off	100Base-T network connection is broken
LED2	On	Data is being transmitted at 100Mbps
LED2	Off	Data is not being transmitted at 100Mbps
LED3	On	100Base-TX selected
LED3	Off	100Base-TX is not selected
LED4	On	10Base-T network connection is good
LED4	Blinking	Data is being received at 10Mbps
LED4	Off	10Base-T network connection is broken
LED5	On	Data is being transmitted at 10Mbps
LED5	Off	Data is not being transmitted at 10Mbps
LED6	On	10Base-T selected
LED6	Off	10Base-T is not selected