


JC INFORMATION SYSTEMS CORPORATION

286-12/16/20 MODEL 1080 VER 1.1C

Processor 80286
Processor Speed 12/16/20MHz
Chip Set C & T SCAT
Max. Onboard DRAM 4MB
Cache None
BIOS C & T
Dimensions 220mm x 220mm
I/O Options 8-bit factory test card slot
NPU Options 80287

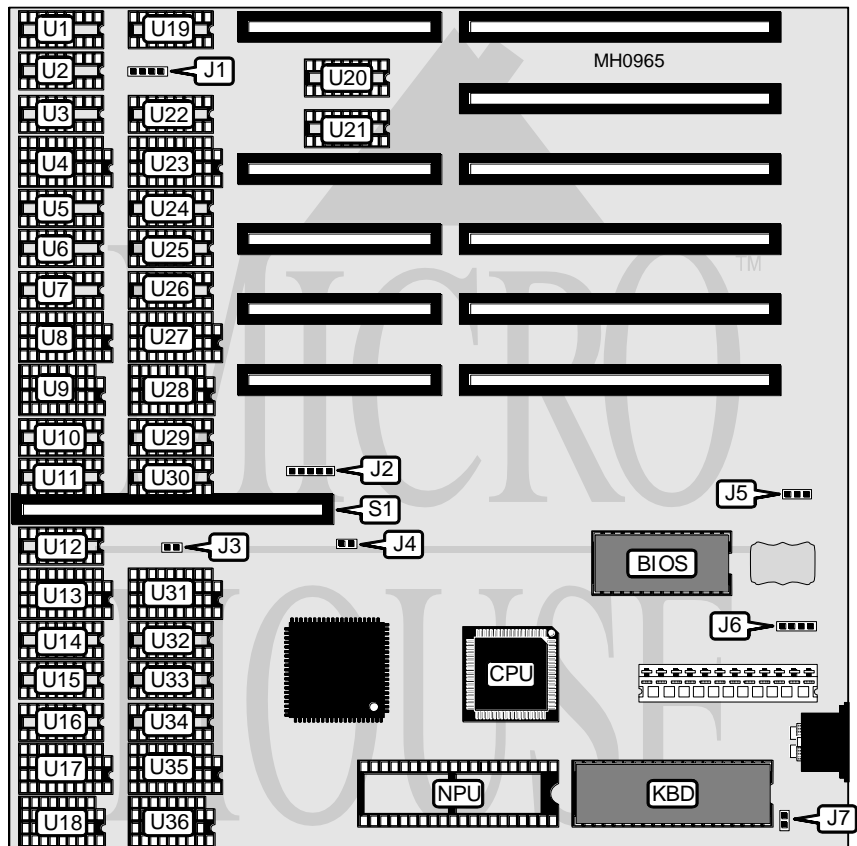

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Turbo LED	J4
Power LED & keylock	J2	External battery	J6
Reset switch	J3	8-bit factory test card	S1

Continued on next page . . .

JC INFORMATION SYSTEMS CORPORATION
286-12/16/20 MODEL 1080 VER 1.1C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation (internal battery)	J5	pins 2 & 3 closed
CMOS memory normal operation (external battery)	J5	Open
CMOS memory clear	J5	pins 1 & 2 closed
í Monitor type select color	J7	Closed
Monitor type select monochrome	J7	Open

DRAM CONFIGURATION						
Size	U23, U27, U31, U35	U28 & U36	U4, U8, U13, U17	U9 & U18	U19-U36	U1-U18
512KB	(4) 44256	(2) 41256	NONE	NONE	N/A	N/A
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	N/A	N/A
2MB	N/A	N/A	N/A	N/A	(18) 411000	NONE
4MB	N/A	N/A	N/A	N/A	(18) 411000	(18) 411000