DELL COMPUTER CORPORATION SYSTEM 4XX/P NETPLEX

80486SX/80486DX/80486DX2 **Processor**

Processor Speed 25/33/50(internal)/50/66(internal)MHz


Chip Set Max. Onboard DRAM 32MB Cache 128KB **BIOS** Phoenix

Dimensions 330mm x 218mm

Bus mouse port, floppy drive interface, IDE interface, parallel port, riser I/O Options

card slot, serial ports (2), VGA feature connector, VGA port

NPU Options

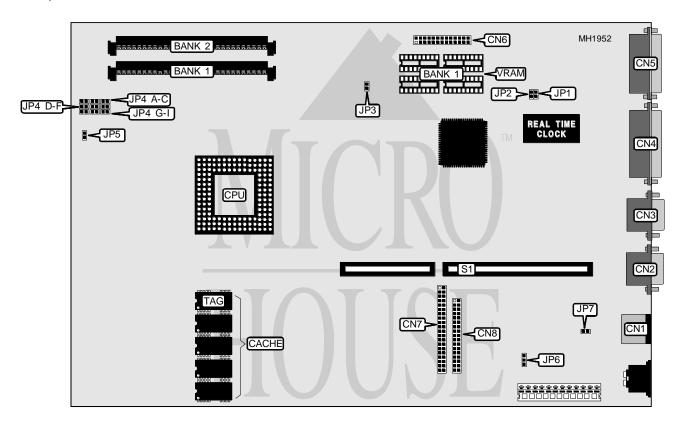

CONNECTIONS			
Purpose	Location	Purpose	Location
Bus mouse port	CN1	VGA feature connector	CN6
Serial port 1	CN2	IDE interface LED	CN7
Serial port 2	CN3	Floppy drive interface	CN8
Parallel port	CN4	IDE interface LED	JP5
VGA port	CN5	Riser card slot	S1

Continued next page...

DELL COMPUTER CORPORATION SYSTEM 4XX/P NETPLEX

. . . continued from previous page.

USER CONFIGURABLE SETTINGS			
Function	Jumper	Position	
í VGA IRQ9 disabled	JP1	Open	
VGA IRQ9 enabled	JP1	Closed	
í Monitor type select color	JP2	Closed	
Monitor type select monochrome	JP2	Open	
í Password enabled	JP7	Closed	
Password disabled	JP7	Open	

PARALLEL PORT CONFIGURATION		
Port	JP6	
LPT 1/IRQ7	pins 1 & 2 closed	
LPT 1/IRQ5 pins 2 & 3 closed		
LPT 3/IRQ7	pins 1 & 2 closed	
Disabled Open		

	DRAM CONFIGURATION		
Size	Bank 1	Bank 2	
4MB	(1) 1M x 36	NONE	
5MB	(1) 1M x 36	(1) 256K x 36	
8MB	(1) 1M x 36	(1) 1M x 36	
16MB	(1) 4M x 36	NONE	
17MB	(1) 4M x 36	(1) 256K x 36	
20MB	(1) 4M x 36	(1) 1M x 36	
32MB	(1) 4M x 36	(1) 4M x 36	

	VIDEO RAM CONFIGURATION	
Size	Bank 0	Bank 1
512KB	(4) 256KB x 4 NONE	
1MB	(4) 256KB x 4	(4) 256KB x 4
Note: Bank 0 is factory installed and is not configurable.		

CPU SPEED CONFIGURATION		
CPU speed JP3		
25MHz	Closed	
33MHz Open		
50iMHz	Closed	
66iMHz	Open	

	CPU TYPE SELECT			
	CPU type	JP4 A-C	JP4D-F	JP4G-I
	80486SX	Closed	Open	Open
	80487SX	Open	Open	Closed
Ī	80486DX	Open	Closed	Open
Ī	80486DX2	Open	Closed	Open