


# NCR CORPORATION

## MODEL 3279-10XX PC810 (REV. 03-92)

<b>Processor</b>	80286 (exact location unidentified)
<b>Processor Speed</b>	6/10MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	640KB (exact location unidentified)
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	Unidentified
<b>I/O Options</b>	None
<b>NPU Options</b>	80287(exact location unidentified)

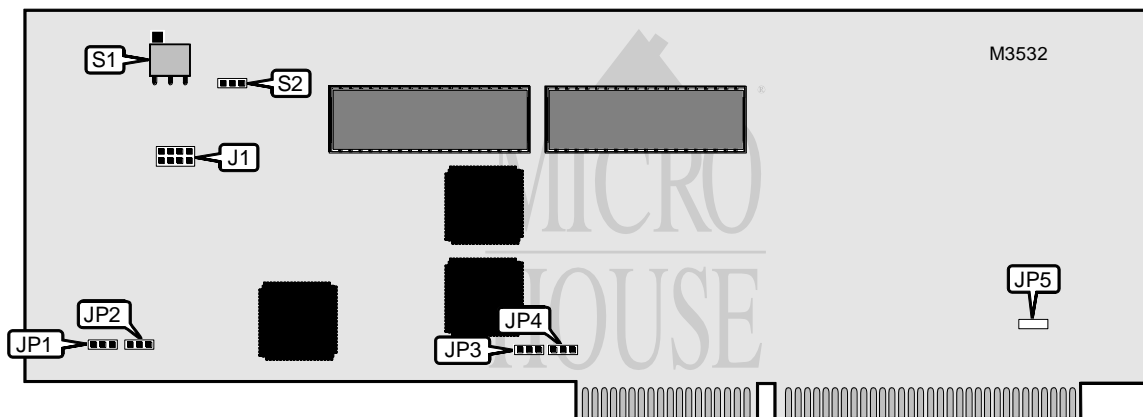

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í BIOS type select 32KB	J1	Pins 3 & 6, 4 & 5 closed
BIOS type select 16KB	J1	Pins 1 & 8, 2 & 7 closed
í Wait state select 1 wait state	JP1	Pins 1 & 2 closed
Wait state select 0 wait states	JP1	Pins 2 & 3 closed
í 10MHz CPU speed enabled	JP2	Pins 1 & 2 closed
10MHz CPU speed disabled	JP2	Pins 2 & 3 closed
í On board memory enabled	JP4	Pins 1 & 2 closed
On board memory disabled	JP4	Pins 2 & 3 closed
Jumper information unavailable	JP5	Unidentified
í Monitor type select color	S1	Left
Monitor type select monochrome	S1	Right

*Continued on next page. . .*

# NCR CORPORATION

## MODEL 3279-10XX PC810 (REV. 03-92)

... continued from previous page

### DRAM CONFIGURATION

Note: Board accepts 512KB/640KB memory. The chip sizes and location is unidentified.

### DRAM JUMPER CONFIGURATION

Size	JP3
512KB	Pins 1 & 2 closed
640KB	Pins 2 & 3 closed

### CPU SPEED SELECTION

Speed	S2
6MHz	Pins 2 & 3 closed
10MHz	Pins 1 & 2 closed