


IBM CORPORATION

486SLC2

Processor	486SLC2
Processor Speed	Unidentified
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	16MB
Maximum Video Memory	None
Cache	None
BIOS	Award
Dimensions	221mm x 191mm
I/O Options	None
NPU Options	80387SX

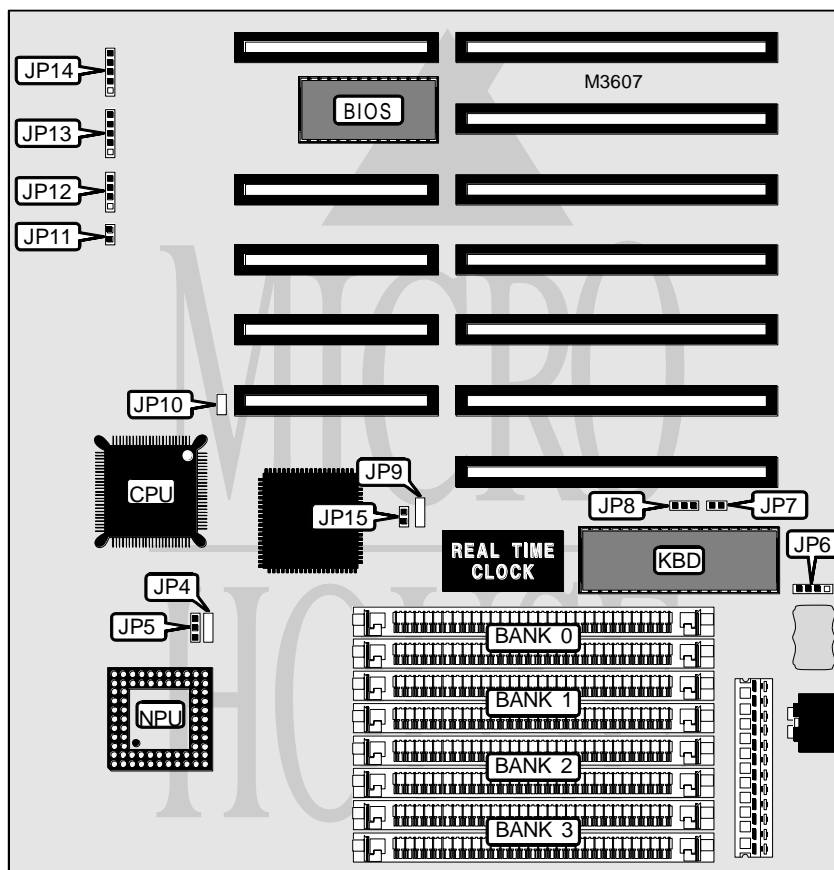

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP6	Turbo LED	JP13 pins 1 & 2
Reset switch	JP11	Turbo switch	JP13 pins 4 & 5
Speaker	JP12	Power LED & keylock	JP14

Continued on next page . . .

IBM CORPORATION

486SLC2

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP4	Unidentified
NPU synchronous with CPU	JP5	Pins 1 & 2 closed
NPU asynchronous with CPU	JP5	Pins 2 & 3 closed
Battery type select DS1287	JP7	Closed
Battery type select 146818	JP7	Open
Monitor type select color	JP8	Pins 2 & 3 closed
Monitor type select monochrome	JP8	Pins 1 & 2 closed
í Factory configured - do not alter	JP9	Unidentified
í Factory configured - do not alter	JP10	Unidentified
Parity check enabled	JP15	Open
Parity check disabled	JP15	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None	None	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	None	None	None
16MB	(2) 4M x 9	(2) 4M x 9	None	None