


DTK COMPTUER, INC. PTM-1010V2 (EDIT. 1.01)

Processor	80286
Processor Speed	10MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	DTK
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

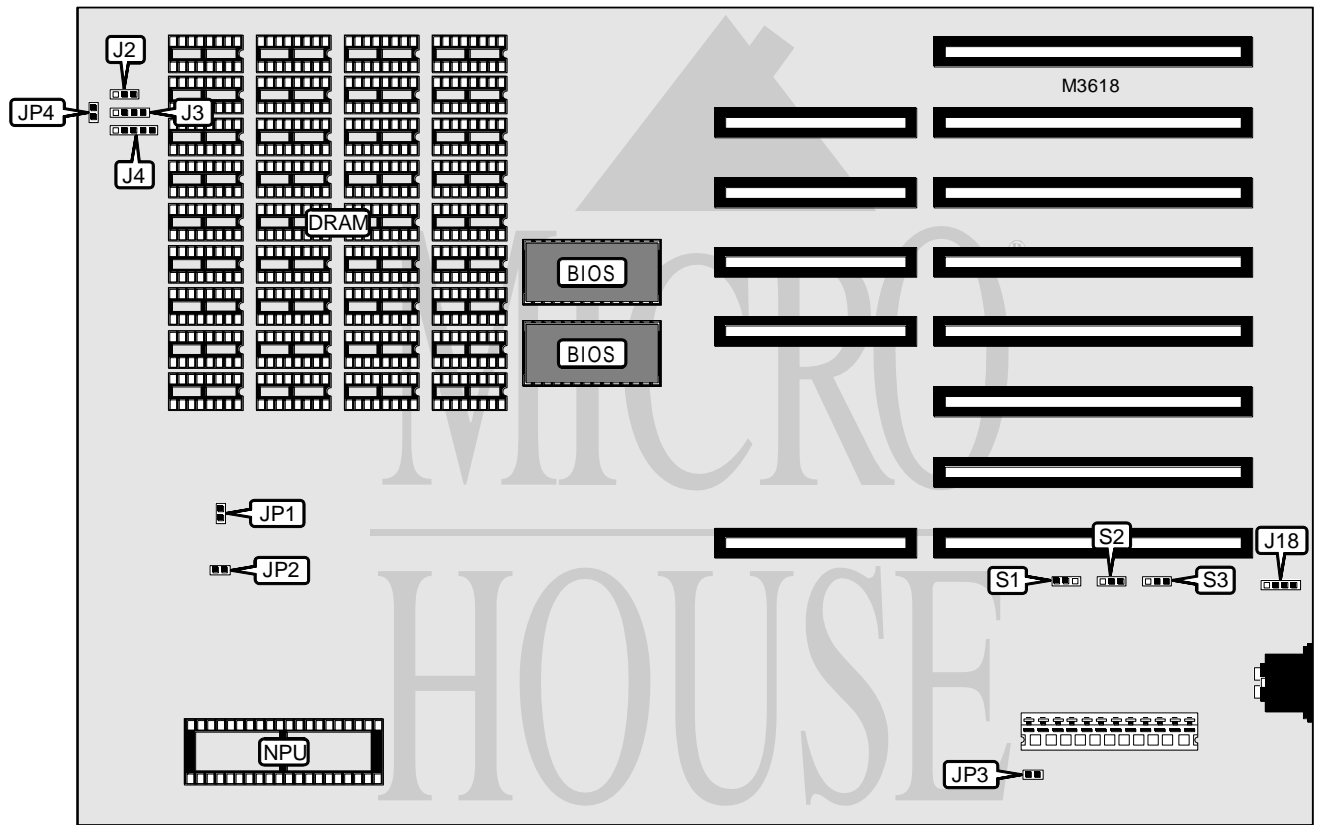

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J3	Turbo LED	JP1
Power LED & keylock	J4	Turbo switch	JP3
External battery	J18	Reset switch	JP4

Continued on next page. . .

DTK COMPTUER, INC.
PTM - 1010V2 (EDIT. 1.01)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
BIOS type select 27128	J2	Pins 2 & 3 closed
BIOS type select 27256	J2	Pins 1 & 2 closed
Wait state select 0 wait states	JP2	Closed
Wait state select 1 wait state	JP2	Open
Monitor type select color	S1	Pins 1 & 2 closed
Monitor type select monochrome	S1	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(9) 41256	(9) 41256	None	None
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164
1MB	(9) 41256	(9) 41256	(9) 41256	(9) 41256

Note: The location of the banks are unidentified.

DRAM JUMPER CONFIGURATION		
Size	S2	S3
512KB	Pins 1 & 2 closed	Pins 2 & 3 closed
640KB	Pins 2 & 3 closed	Pins 1 & 2 closed
1MB	Pins 1 & 2 closed	N/A