


COMPAQ COMPUTER CORPORATION

PROLIANT 1500/1500R

Processor	Pentium/Pentium Pro
Processor Speed	75/100/120/133/166/200MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	Depends on CPU board installed
Maximum Video Memory	None
Cache	256/512KB
BIOS	Unidentified
Dimensions	Unidentified
I/O Options	Unidentified
NPU Options	None

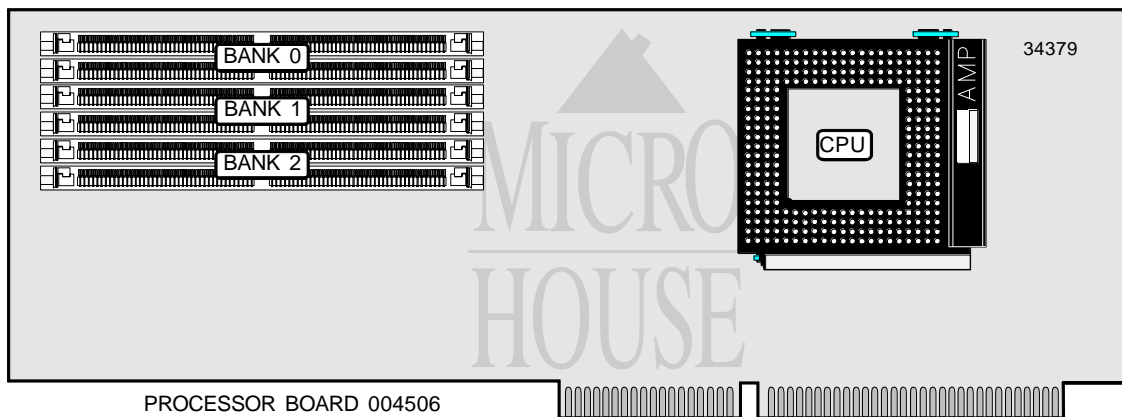

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í On board video enabled	S1/1	Off
On board video disabled	S1/1	On
í Configuration lock disabled	S1/2	Off
Configuration lock enabled	S1/2	On
í System installed in a tower chassis	S1/3	Off
System installed in a rack mount	S1/3	On
í Floppy drive boot disabled	S1/4	Off
Floppy drive boot enabled	S1/4	On
í Password normal operation	S1/5	Off
Password clear	S1/5	On
í CMOS memory normal operation	S1/6	Off
CMOS memory clear	S1/6	On

Continued on next page. . .


COMPAQ COMPUTER CORPORATION
 PROLIANT 1500/1500R

... continued from previous page

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
10MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None	None
32MB	(2) 2M x 36	(2) 2M x 36	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None	None
64MB	(2) 4M x 36	(2) 4M x 36	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION
Note: 256KB cache is factory installed and is not configurable.

DRIVE SELECTION			
SCSI ID	ID0	ID1	ID2
5	On	Off	On
6	Off	On	On

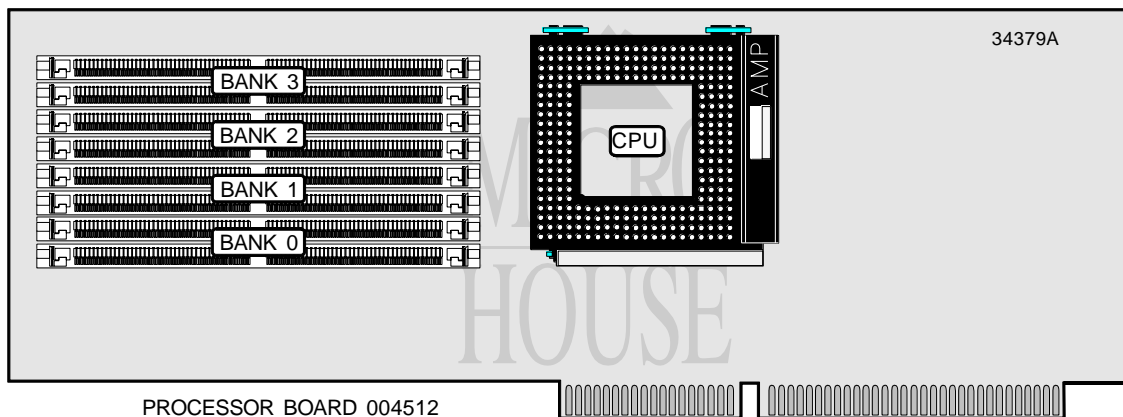

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(2) 1M x 36	None	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None	None
16MB	(2) 2M x 36	None	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	None
32MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36


Continued on next page. ...

COMPAQ COMPUTER CORPORATION
 PROLIANT 1500/1500R

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
32MB	(2) 2M x 36	(2) 2M x 36	None	None
32MB	(2) 4M x 36	None	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	None
64MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None	None
64MB	(2) 8M x 36	None	None	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36	None
128MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	None
256MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION
 Note: 256KB cache is factory installed and is not configurable.

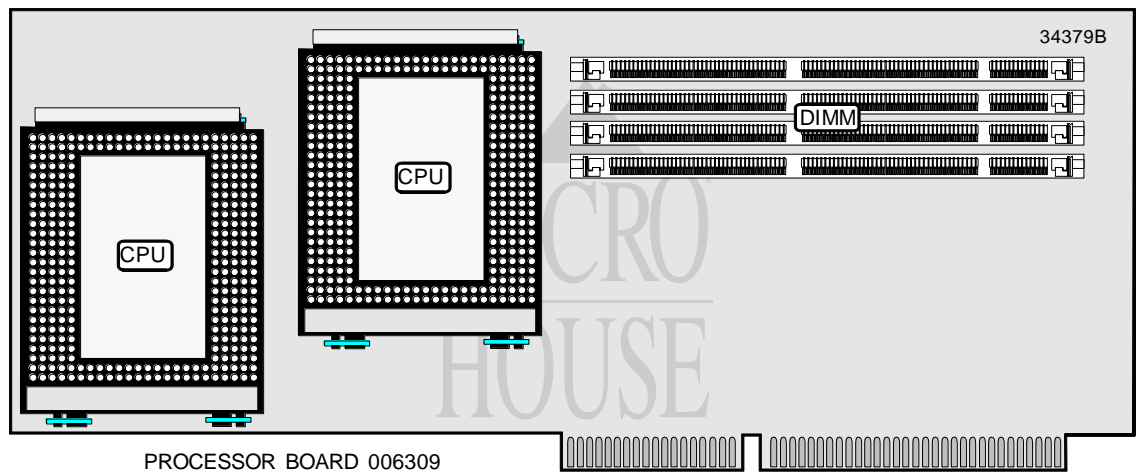

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
32MB	(1) 4M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 8M x 64	None	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 16M x 64	None	None	None

Continued on next page...

COMPAQ COMPUTER CORPORATION
 PROLIANT 1500/1500R

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 32M x 64	None	None	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1GB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

CACHE CONFIGURATION

Note: 256KB cache is located on the Pentium Pro CPU.

TECHNICAL NOTE

Note: The location of all jumpers and switches are unidentified.