


BOCA RESEARCH INC.
IO/AT 44

Card Type	Multi I/O card
Chipset/Controller	Startech
I/O Options	Parallel ports (2), serial ports (2)
Maximum DRAM	N/A

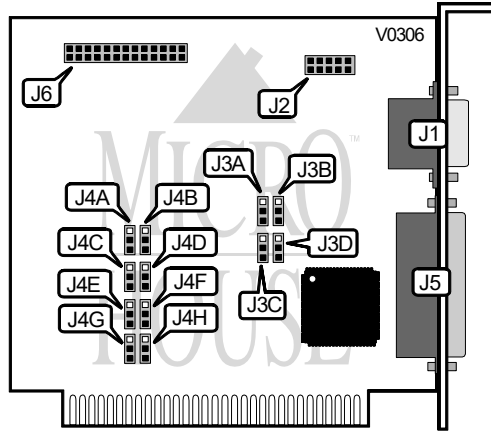

CONNECTIONS			
Port	Location	Port	Location
Serial port 1	J1	Parallel port 1	J5
Serial port 2	J2	Parallel port 2	J6

PARALLEL PORT CONFIGURATION			
Port 1 (J5)	Port 2 (J3)	3/A	3/B
1 LPT1	1 LPT2	Pins 1 & 2 closed	Pins 2 & 3 closed
LPT2	LPT1	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	LPT1	Open	Pins 1 & 2 closed
Disabled	LPT2	Open	Pins 2 & 3 closed
LPT1	Disabled	Pins 1 & 2 closed	Open
LPT2	Disabled	Pins 2 & 3 closed	Open
Disabled	Disabled	Open	Open

PARALLEL PORT INTERRUPT SELECT			
Port 1 (J5)	Port 2 (J3)	3C	3D
IRQ7	IRQ5	Pins 1 & 2 closed	Pins 2 & 3 closed
IRQ5	IRQ7	Pins 2 & 3 closed	Pins 1 & 2 closed

Continued on next page . . .

BOCA RESEARCH INC.
IO/AT 44

... continued from previous page

SERIAL PORT CONFIGURATION					
Port 1 (J1)	Port 2 (J2)	J4/A	J4/B	J4/C	J4/D
COM1	COM2	Pins 1 & 2	Pins 2 & 3	Open	Open
COM1	COM3	Pins 1 & 2	Open	Open	Pins 1 & 2
COM1	COM4	Pins 1 & 2	Open	Open	Pins 2 & 3
COM2	COM1	Pins 2 & 3	Pins 1 & 2	Open	Open
COM2	COM3	Pins 2 & 3	Open	Open	Pins 1 & 2
COM2	COM4	Pins 2 & 3	Open	Open	Pins 2 & 3
COM3	COM1	Open	Pins 1 & 2	Pins 1 & 2	Open
COM3	COM2	Open	Pins 2 & 3	Pins 1 & 2	Open
COM3	COM4	Open	Open	Pins 1 & 2	Pins 2 & 3
COM4	COM1	Open	Pins 1 & 2	Pins 2 & 3	Open
COM4	COM2	Open	Pins 2 & 3	Pins 2 & 3	Open
COM4	COM3	Open	Open	Pins 2 & 3	Pins 1 & 2
Disabled	COM1	Open	Pins 1 & 2	Open	Open
Disabled	COM2	Open	Pins 2 & 3	Open	Open
Disabled	COM3	Open	Open	Open	Pins 1 & 2
Disabled	COM4	Open	Open	Open	Pins 2 & 3
COM1	Disabled	Pins 1 & 2	Open	Open	Open
COM2	Disabled	Pins 2 & 3	Open	Open	Open
COM3	Disabled	Open	Open	Pins 1 & 2	Open
COM4	Disabled	Open	Open	Pins 2 & 3	Open

Note: Pins designated should be in the closed position.

Continued on next page ...

BOCA RESEARCH INC.
IO/AT 44

... continued from previous page

SERIAL PORT INTERRUPT SELECT					
Port 1 (J1)	Port 2 (J2)	J4/E	J4/F	J4/G	J4/H
í IRQ4	í IRQ3	Open	Open	Pins 1 & 2	Pins 2 & 3
IRQ4	IRQ2	Open	Pins 1 & 2	Pins 1 & 2	Open
IRQ4	IRQ5	Open	Pins 2 & 3	Pins 1 & 2	Open
IRQ2	IRQ3	Pins 1 & 2	Open	Open	Pins 2 & 3
IRQ2	IRQ4	Pins 1 & 2	Open	Open	Pins 1 & 2
IRQ2	IRQ5	Pins 1 & 2	Pins 2 & 3	Open	Open
IRQ3	IRQ2	Open	Pins 1 & 2	Pins 2 & 3	Open
IRQ3	IRQ4	Open	Open	Pins 2 & 3	Pins 1 & 2
IRQ3	IRQ5	Open	Pins 2 & 3	Pins 2 & 3	Open
IRQ5	IRQ2	Pins 2 & 3	Pins 1 & 2	Open	Open
IRQ5	IRQ3	Pins 2 & 3	Open	Open	Pins 2 & 3
IRQ5	IRQ4	Pins 2 & 3	Open	Open	Pins 1 & 2
Disabled	IRQ2	Open	Pins 1 & 2	Open	Open
Disabled	IRQ3	Open	Open	Open	Pins 2 & 3
Disabled	IRQ4	Open	Open	Open	Pins 1 & 2
Disabled	IRQ5	Open	Pins 2 & 3	Open	Open
IRQ2	Disabled	Pins 1 & 2	Open	Open	Open
IRQ3	Disabled	Open	Open	Pins 2 & 3	Open
IRQ4	Disabled	Open	Open	Pins 1 & 2	Open
IRQ5	Disabled	Pins 2 & 3	Open	Open	Open

Note: Pins designated should be in the closed position.