
BOCA RESEARCH INC. BB1610

Card Type Chipset/Controller I/O Options Maximum DRAM

I/O controller Startech Serial ports (16) 128KB

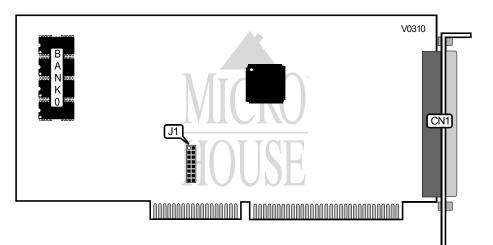

CONNECTIONS	
Purpose	Location
DB-37 connector (for 16-port BB0017 concentrator	CN1
box)	

MULTIPLE BB1610 CONFIGURATION		
Card Number	J1	
1	Pins 1 & 2 closed	
2	Pins 3 & 4 closed	
3	Pins 5 & 6 closed	
4	Pins 7 & 8 closed	
Note: Up to four cards may be used in a single system, as long as no two cards share the same card number designation.		

I/O ADDRESS SELECT		
Address	J1	
O2E8h	Pins 9 &10 closed	
O2F8h	Pins 11 & 12 closed	
03E8h	Pins 13 & 14 closed	
03F8h	Pins 15 & 16 closed	
Note: Multiple cards in a single system must share the same I/O address.		