


BOCA RESEARCH INC.

BB8002

Card Type	I/O controller
Chipset/Controller	Unidentified
I/O Options	Serial ports (10)
Maximum DRAM	N/A

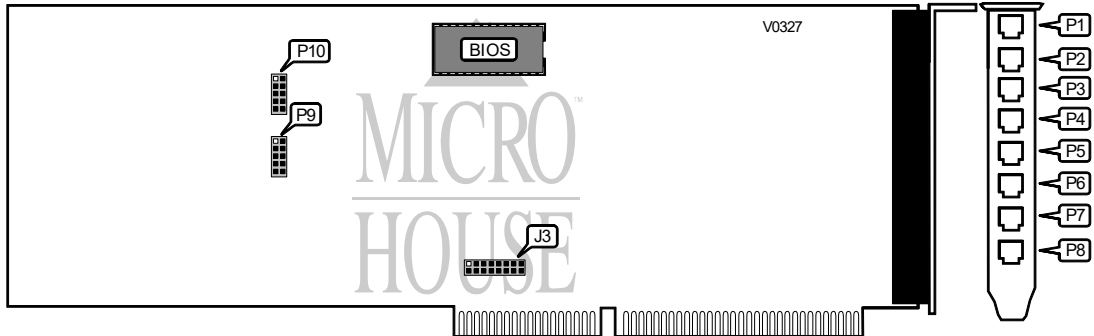

CONNECTIONS			
Purpose	Location	Purpose	Location
RJ11 serial port 1	P1	RJ11 serial port 6	P6
RJ11 serial port 2	P2	RJ11 serial port 7	P7
RJ11 serial port 3	P3	RJ11 serial port 8	P8
RJ11 serial port 4	P4	DB-9 serial connector 9	P9
RJ11 serial port 5	P5	DB-9 serial connector 10	P10

I/O ADDRESS CONFIGURATION	
Address	J3
02E8h	Pins 9 & 10 closed
02F8h	Pins 11 & 12 closed
03E8h	Pins 13 & 14 closed
03F8h	Pins 15 & 16 closed

Note: If more than one BB8002 card is used in the same system, those cards must share the same address setting.

SYSTEM CONFIGURATION	
Card Number	J3
1	Pins 1 & 2 closed
2	Pins 3 & 4 closed
3	Pins 5 & 6 closed
4	Pins 7 & 8 closed

Note: Up to four BB8002 cards may be used in a single system, so long as they have different card number designations.