


LONGSHINE MICROSYSTEM, INC.  
LCS-8880

<b>Card Type</b>	Serial Controller
<b>Chipset/Controller</b>	Unidentified UART
<b>I/O Options</b>	Serial I/O ports(4 via DB-37 port)
<b>Maximum DRAM</b>	N/A

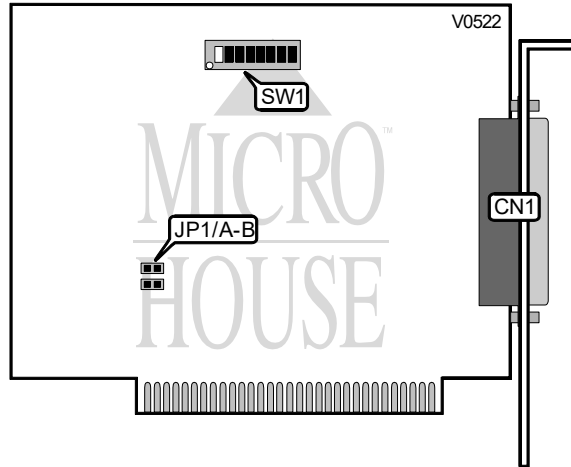

CONNECTIONS	
Purpose	Location
DB-37 I/O interface	CN1

ENHANCED MODE I/O ADDRESS SELECT					
Channel 1	Channel 2	Channel 3	Channel 4	SW1/7	SW1/8
2A0 - 2A7h	2A8 - 2AFh	2B0 - 2B7h	2B8 - 2BEh	On	Off
1A0 - 1A7h	1A8 - 1AFh	1B0 - 1B7h	1B8 - 1BEh	On	On

COMPATIBLE MODE I/O ADDRESS SELECT					
Channel 1	Channel 2	Channel 3	Channel 4	SW1/7	SW1/8
3F8 - 3FFh	2F8 - 2FFh	2B0 - 2B7h	2B8 - 2BEh	Off	Off
3F8 - 3FFh	2F8 - 2FFh	1B0 - 1B7h	1B8 - 1BEh	Off	On

INTERRUPT SELECT						
IRQ	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
IRQ4	Off	Off	On	Off	Off	Off
IRQ3	Off	On	Off	Off	Off	Off
IRQ5	Off	Off	Off	On	Off	Off
IRQ6	Off	Off	Off	Off	On	Off
IRQ7	Off	Off	Off	Off	Off	On
IRQ9	On	Off	Off	Off	Off	Off

Continued on next page . . .

LONGSHINE MICROSYSTEM, INC.  
LCS-8880

... continued from previous page

SPEED SELECT		
Speec	JP1/A	JP1/B
<16Mhz	Closed	Open
16Mhz	Closed	Open
>16Mhz	Open	Closed