


# CREATIVE LABS, INC. SOUNDBLASTER 2.0 (CT1350)

Card Type	Sound card
Chipset/Controller	Creative Technology
I/O Options	Game/MIDI port, headphone/speaker jack, line in jack, microphone jack, volume control
Maximum DRAM	N/A
Data Bus	8-bit ISA

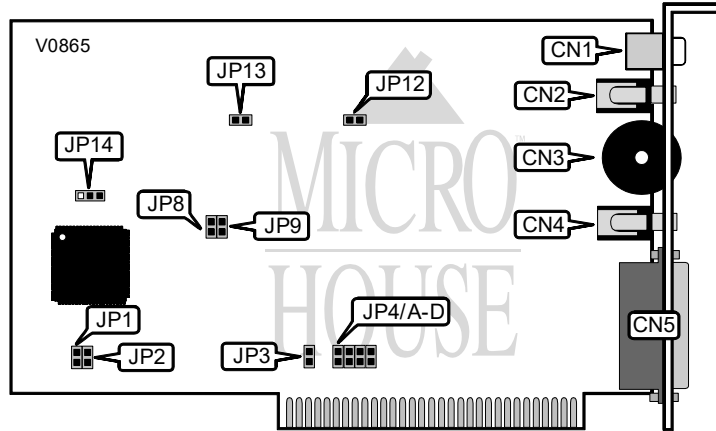

CONNECTIONS			
Purpos	Location	Purpose	Location
Audio line-in jack	CN1	Headphone/speaker jack	CN4
Microphone jack	CN2	Game/MIDI port	CN5
Volume control	CN3		

I/O ADDRESS		
Adresse	JP1	JP2
í 22Xh	Open	Closed
24Xh	Closed	Open

INTERRUPT SELECT - JP4				
IRQ	umper A	umper B	umper C	umper D
í IRQ7	Open	Open	Open	Closed
IRQ2	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
IRQ5	Open	Open	Closed	Open

GAME PORT	
Setting	JP8
í Enabled	Closed
Disabled	Open

Continued on next page. . .

CREATIVE LABS, INC.  
SOUNDBLASTER 2.0 (CT1350)

...continued from previous page

CMS CHIPSET	
Setting	JP9
Disabled/not installed	Closed
Enabled/installed	Open

DMA SHARING	
Setting	JP14
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP3	Closed
JP12	N/A
JP13	N/A

Note: The purpose and settings of JP12 and JP13 are unidentified.