


AZTECH LABS, INC. SOUND GALAXY NOVA 16 EXTRA

Card Type	Sound
Chipset Controller	Unidentified
I/O Options	CD-ROM interface (3), CD Audio in, game/MIDI port, Line in, Line out, Speaker out, Multimedia PC speaker out, PC speaker in, Microphone jack, Wave table synthesis interface, Volume control
Maximum DRAM	N/A

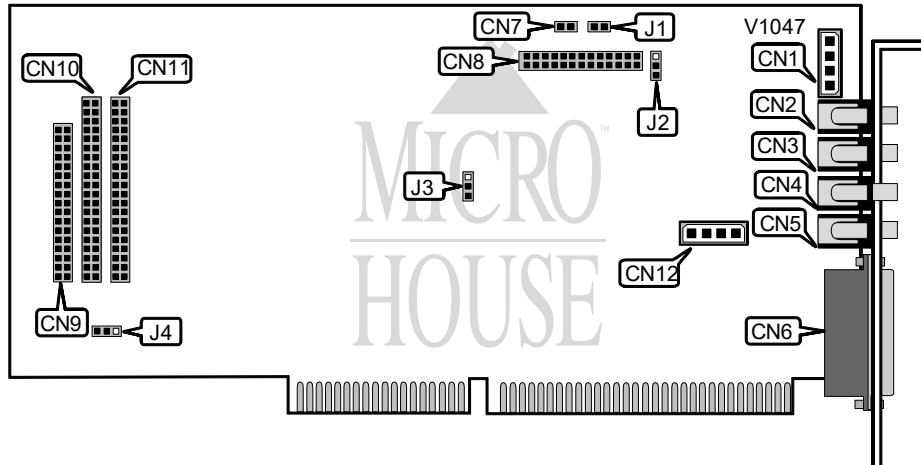

CONNECTIONS			
Purpose	Location	Purpose	Location
CD audio in	CN1	PC speaker in	CN7
Line in	CN2	Wave table interface	CN8
Microphone	CN3	Sony CD-ROM	CN9
Line out	CN4	Mitsumi/Aztech CD-ROM	CN10
Speaker out	CN5	Panasonic CD-ROM	CN11
Game/MIDI port	CN6	Multimedia PC speaker out	CN12

PC SPEAKER AMPLIFICATION	
Setting	J1
Low amplification	Open
High amplification	Closed

MICROPHONE TYPE	
Type	J2
Condenser	Pins 1 & 2 closed
Carbon	Pins 2 & 3 closed

Continued next page...

AZTECH LABS, INC.
SOUND GALAXY NOVA 16 EXTRA

... continued from previous page.

I/O BASE ADDRESS	
Address	J4
í 220h - 22Fh	Pins 1 & 2 closed
240h - 24Fh	Pins 2 & 3 Closed

EEPROM	
Setting	J3
í Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed