


# CREATIVE LABS, INC. 16-BIT AUDIO CARD (MIDI VER.1)

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Game/MIDI port, CD-ROM audio in , wavetable connector, microphone in, line in, line out, PC speaker connector
Data Bus	16-bit ISA

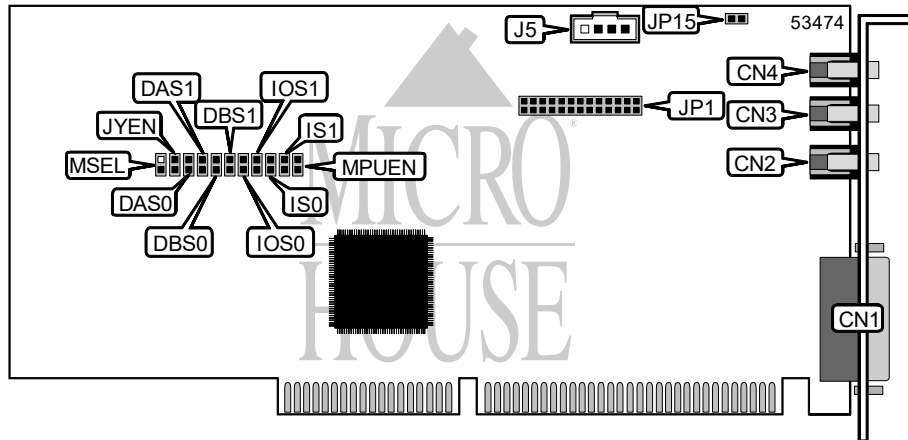

CONNECTIONS				
Function		Label	Function	
Game/MIDI port		CN1	Audio in - CD-ROM	
Line out		CN2	Wavetable connector	
Microphone in		CN3	PC Speaker connector	
Line in		CN4		

USER CONFIGURABLE SETTINGS			
Function		Label	Position
i MPU I/O address 330h		MSEL	Closed
MPU I/O address 300h		MSEL	Open
i MPU-401 enabled		MPUEN	Closed
MPU-401 disabled		MPUEN	Open
i Joystick enabled		JYEN	Closed
Joystick disabled		JYEN	Open

BASE I/O ADDRESS			
Setting	IOS0		IOS1
i 220h	Closed		Closed
240h	Closed		Open
260h	Open		Closed
280h	Open		Open

Continued on next page . . .

CREATIVE LABS, INC.  
 16-BIT AUDIO CARD (MIDI VER.1)

. . . continued from previous page

LOW DMA CHANNEL SELECTION		
Setting	DAS0	DAS1
DMA 0	Closed	Closed
iDMA 1	Open	Closed
DMA 3	Closed	Open
Disabled	Open	Open

HIGH DMA CHANNEL SELECTION		
Setting	DBS0	DBS1
iDMA 5	Closed	Closed
DMA 6	Open	Closed
DMA 7	Closed	Open
Low DMA enabled	Open	Open

INTERRUPT SELECTION		
IRQ	IS0	IS1
2	Closed	Closed
i 5	Closed	Open
7	Open	Closed
10	Open	Open