


# CREATIVE LABS, INC. SOUNDBLASTER 32 IDE PNP (CT3600)

|                        |  |
|------------------------|--|
| Card Type              | Sound card   |
| Chip Set               | Unidentified   |
| Maximum Onboard Memory | Unidentified   |
| I/O Options            | Game/MIDI port, CD-ROM interface, speaker out, line out, line in, microphone in, CD-ROM audio in (2), PC speaker, SPDIF (digital interface format) connector |
| Data Bus               | 16-bit ISA   |

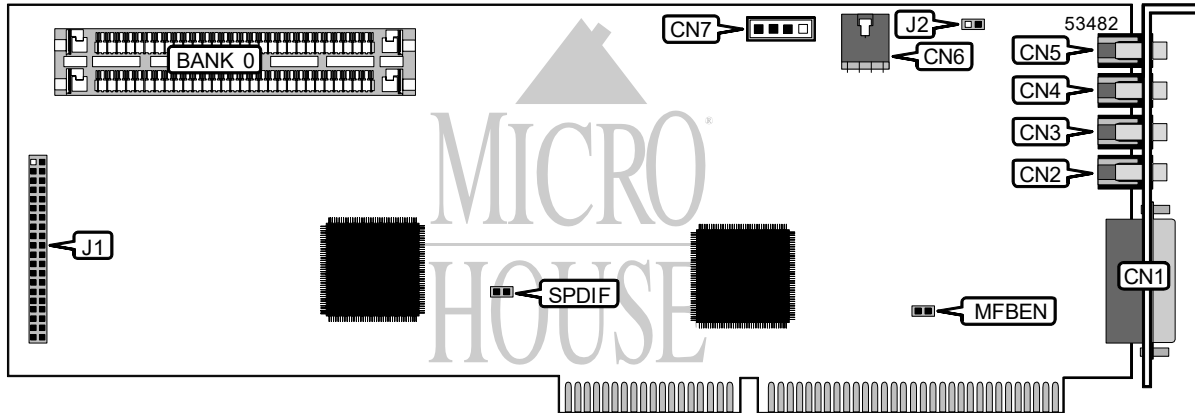

| CONNECTIONS    |       |  |       |  |
|----------------|-------|--|-------|--|
| Function       | Label | Function                                   | Label |  |
| Game/MIDI port | CN1   | Audio in - CD-ROM                          | CN6   |  |
| Speaker out    | CN2   | Audio in - CD-ROM                          | CN7   |  |
| Line out       | CN3   | CD-ROM interface - ATAPI                   | J1    |  |
| Microphone in  | CN4   | PC speaker connector                       | J2    |  |
| Line in        | CN5   | SPDIF (digital interface format) connector | SPDIF |  |

| USER CONFIGURABLE SETTINGS |           |          |  |
|----------------------------|-----------|----------|--|
| Function                   | Label     | Position |  |
| MPU-401 port enabled       | MFBE<br>N | Closed   |  |
| MPU-401 port disabled      | MFBE<br>N | Open     |  |