


TERRATEC PROMEDIA AUDIOSYSTEM EWS64 L

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	64MB DRAM
I/O Options	Game/MIDI port, microphone in (2), line in (4), line out (4), audio in - CD-ROM (4), 10-pin connector, 26-pin connector, beeper out, PC speaker out
Data Bus	16-bit ISA
Card Size	Full-length, full-height card

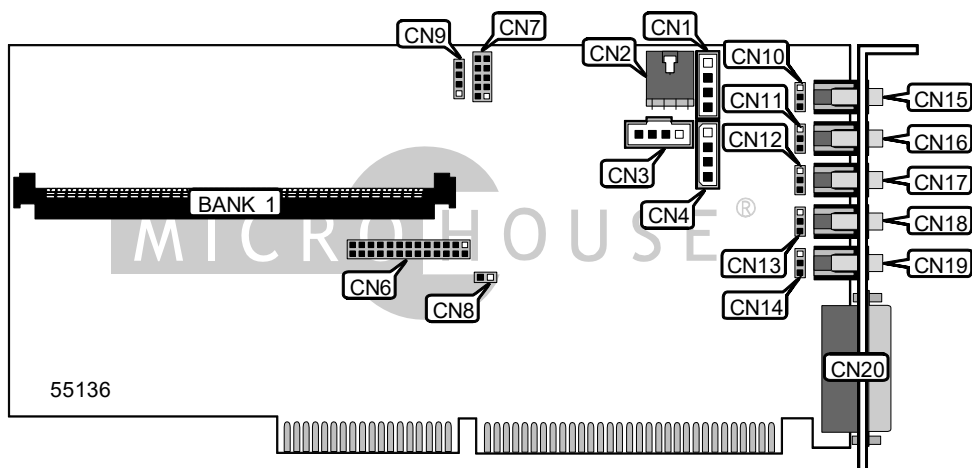

CONNECTIONS			
Function	Label	Function	Label
Audio in - CD-ROM (Mitsumi)	CN1	Line in 1 - internal	CN12
Audio in - CD-ROM (EIDE)	CN2	Line in 2 - internal	CN13
Audio in - CD-ROM (Sony)	CN3	Microphone in - internal	CN14
Audio in - CD-ROM (Panasonic)	CN4	Line out 1 - external	CN15
Unidentified 26-pin connector	CN6	Line out 2 - external	CN16
Unidentified 10-pin connector	CN7	Line in 1 - external	CN17
PC speaker out	CN8	Line in 2 - external	CN18
Beeper out	CN9	Microphone in - external	CN19
Line out 1 - internal	CN10	Game/MIDI port	CN20
Line out 2 - internal	CN11		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	2MB	None
6MB - (8) 1MB x 4	2MB	1MB x 32
6MB - (2) 1MB x 16	2MB	1MB x 32
10MB - (16) 1MB x 4	2MB	2MB x 32
10MB - (4) 1MB x 16	2MB	2MB x 32
10MB - (4) 2MB x 8	2MB	2MB x 32
18MB - (32) 4MB x 1	2MB	4MB x 32
18MB - (8) 4MB x 4	2MB	4MB x 32
34MB - (16) 4MB x 4	2MB	8MB x 32
64MB - (8) 16MB x 4	None	16MB x 32

Note: Location of Memory Bank 0 is unidentified. When using a 64MB SIMM module, the 2MB of integrated on-board memory will become inactive. Not all EDO memory will work, the 64MB SIMM module must use 8 chips versus 32 chips.