


# ADVANCED INTEGRATION RESEARCH, INC.

## 486ES EISA

<b>Processor</b>	80486DX
<b>Processor Speed</b>	25/33/50MHz
<b>Chip Set</b>	Intel
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	128KB
<b>BIOS</b>	AMI/Phoenix
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	32-bit external memory card slot
<b>NPU Options</b>	4167

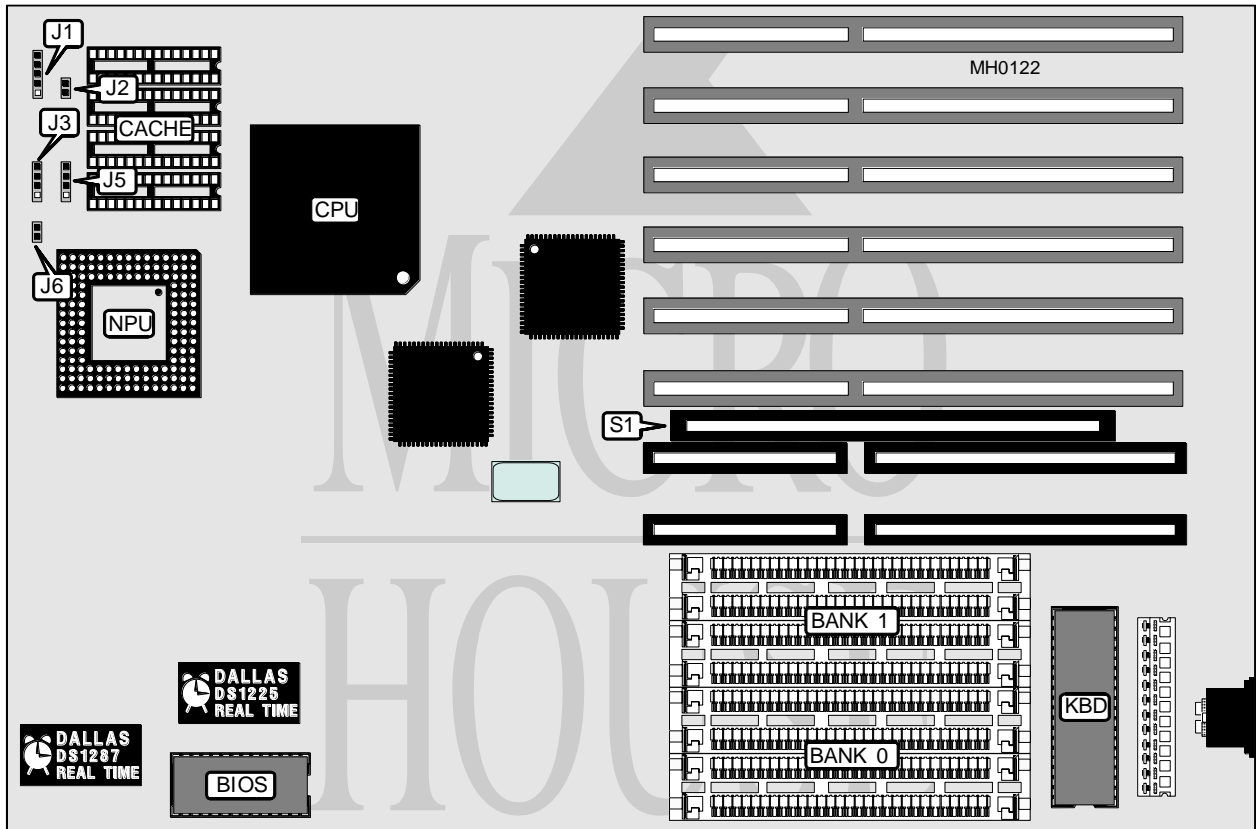

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	Speaker	J5
Reset switch	J2	Turbo switch	J6
Turbo LED	J3 pins 1 & 2	32-bit external memory card	S1

Continued on next page . . .

**ADVANCED INTEGRATION RESEARCH, INC.****486ES EISA**

... continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION	
Size	Bank 0
128KB	(4) 32K x 8