


ORCHID TECHNOLOGY PRIVILEGE GOLD 386-40C

Processor	80386DX
Processor Speed	40MHz
Chip Set	ESEQ
Max. Onboard DRAM	32MB
Cache	128/256KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387/3167

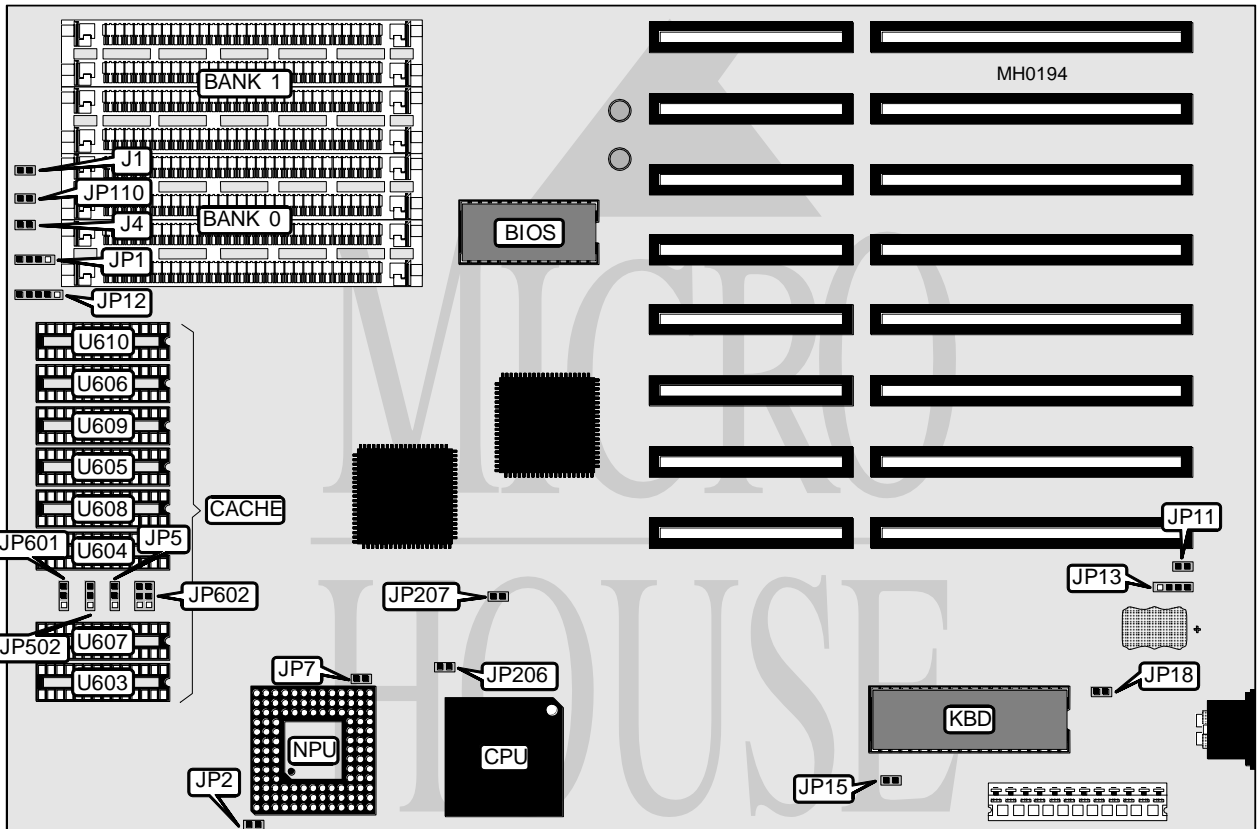

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J1	Power LED & keylock	JP12
Reset switch	J4	External battery	JP13
Speaker	JP1	Turbo LED	JP110

Continued on next page . . .

ORCHID TECHNOLOGY

PRIVILEGE GOLD 386-40C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP2	N/A
í Factory configured - do not alter	JP7	N/A
í Factory configured - do not alter	JP11	N/A
í Factory configured - do not alter	JP18	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
128KB	(4) 32K x 8	NONE
256KB	(4) 32K x 8	(4) 32K x 8

CACHE JUMPER CONFIGURATION					
Size	JP5	JP15	JP502	JP601	JP602
128KB	1 & 2	Open	1 & 2	1 & 2	4 & 5
256KB	2 & 3	Closed	2 & 3	2 & 3	5 & 6

Note: Pins designated should be in the closed position.

NPU TYPE CONFIGURATION		
Type	JP206	JP207
Disabled	Open	Open
80387	Closed	Open
3167	Open	Closed