
## GIGA-BYTE TECHNOLOGY CO., LTD GA-386ES (33/40)

Processor
Processor Speed
Chip Set
Max. Onboard DRAM
Cache
BIOS
Dimensions
I/O Options
NPU Options

80386DX 33/40MHz Elite 32MB 64/128KB AMI/MR 330mm x 218mm 32-bit external memory card 80387/3167

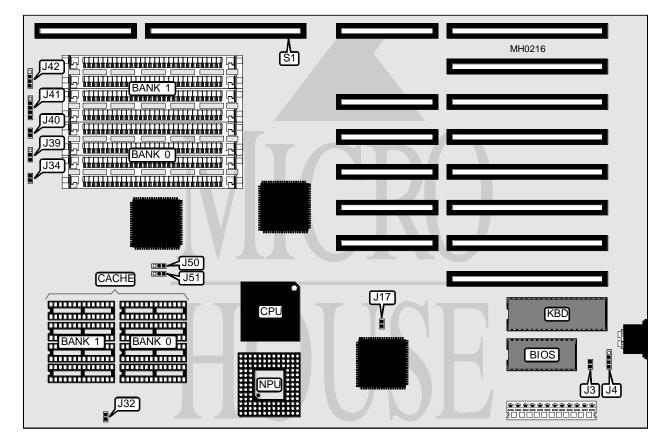

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	J4	Power LED & keylock	J41	
Turbo LED	J34	Speaker	J42	
Turbo switch	J39	32-bit external memory card	S1	
Reset switch	J40			

Continued on next page . . .

## GIGA-BYTE TECHNOLOGY CO., LTD GA-386ES (33/40)

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í CMOS memory normal operation	J3	Closed		
CMOS memory clear	J3	Open		
í Monitor type select color	J17	Closed		
Monitor type select monochrome	J17	Open		
í CPU speed select fast	J39	pins 2 & 3 closed		
CPU speed select switchable from keyboard	J39	pins 1 & 2 closed		

	DRAM CONFIGURATION	
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION				
Size	Bank 1			
64KB	(4) 8K x 8	(4) 8K x 8		
128KB	(4) 32K x 8	NONE		

CACHE CONFIGURATION				
Size	J32	J50	J51	
64KB	Open	pins 2 & 3 closed	pins 2 & 3 closed	
128KB	Closed	pins 1 & 2 closed	pins 1 & 2 closed	