


MICROWAY, INC. NUMBER SMASHER - 386M

Processor	80386DX
Processor Speed	25/33/40MHz
Chip Set	ESEQ
Max. Onboard DRAM	32MB
Cache	64KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387DX/3167

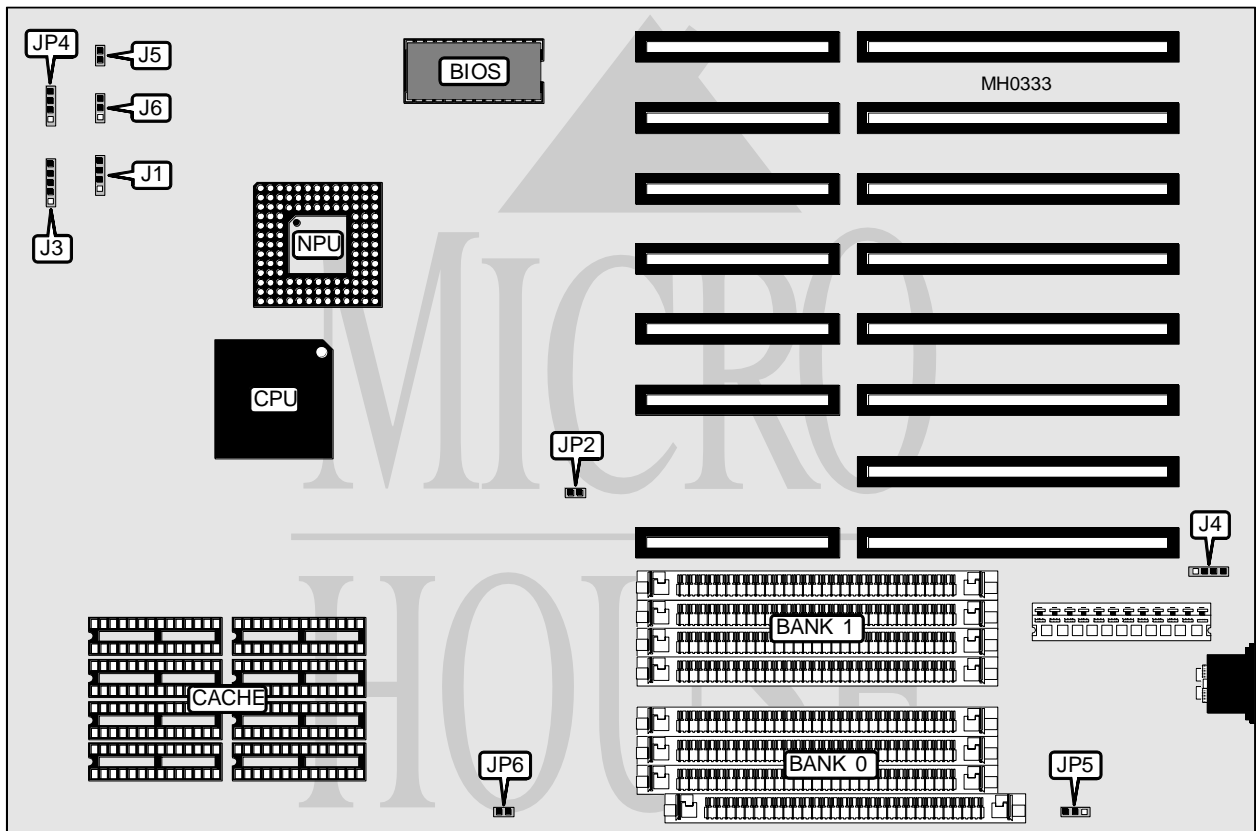

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Reset switch	J5
Power LED & keylock	J3	Turbo switch	J6/pins 1 & 2
External battery	J4	Turbo LED	JP4/pins 1 & 2

Continued on next page . . .

MICROWAY, INC.
NUMBER SMASHER - 386M

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
í Battery select internal	JP5	pins 2 & 3 closed
Battery select external	JP5	pins 1 & 2 closed
í NPU enabled	JP6	Closed
NPU disabled	JP6	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION	
Size	Bank 0
64KB	(8) 8K x 8