


JOINDATA SYSTEMS, INC.

G 3 8 6 S Y M

Processor	80386DX
Processor Speed	25MHz
Chip Set	Symphony
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI
Dimensions	240mm x 230mm
I/O Options	None
NPU Options	80387/3167

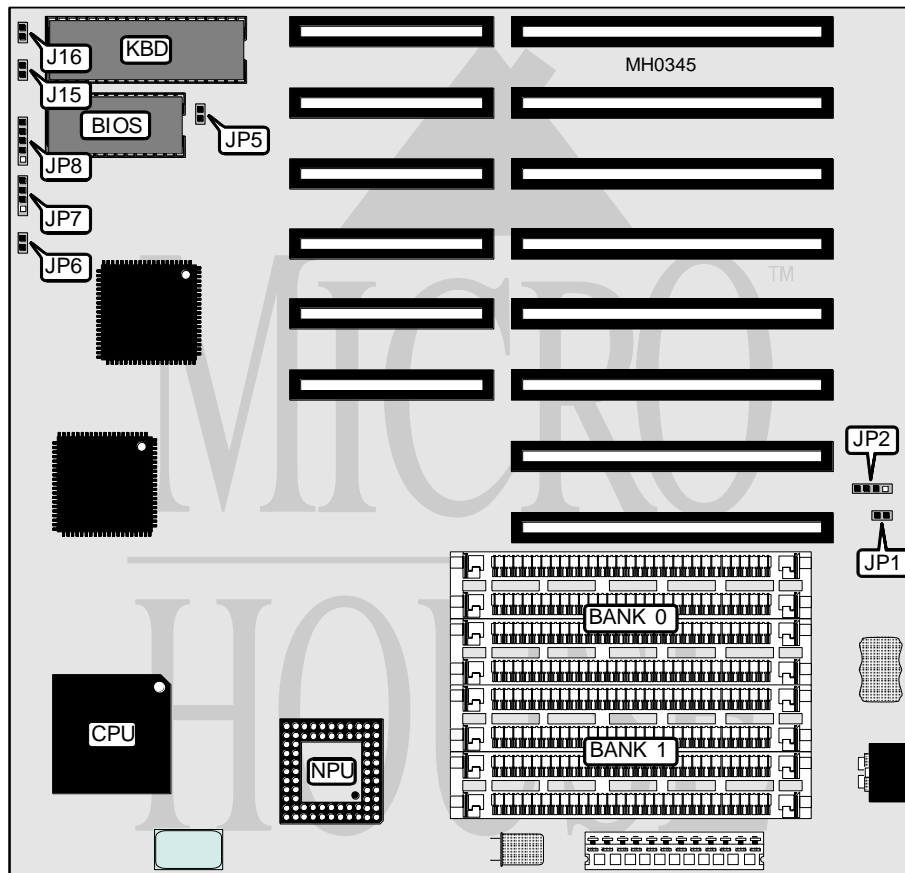

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	J15	Reset switch	JP6
Turbo LED	J16	Speaker	JP7
External battery	JP2	Power LED & keylock	JP8

Continued on next page . . .

JOINDATA SYSTEMS, INC.

G 3 8 6 S Y M

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP1	Closed
CMOS memory clear	JP1	Open
í Monitor type select color	JP5	Closed
Monitor type select monochrome	JP5	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9