
UNIDENTIFIED C - 3 1 6 9 / C - 3 2 0 9

Processor	803869
Processor Speed	16/201
Chip Set	SARC
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	220mn
I/O Options	None
NPU Options	803879

803865X 16/20MHz 5ARC 16MB None AMI 220mm x 220mm None 803875X

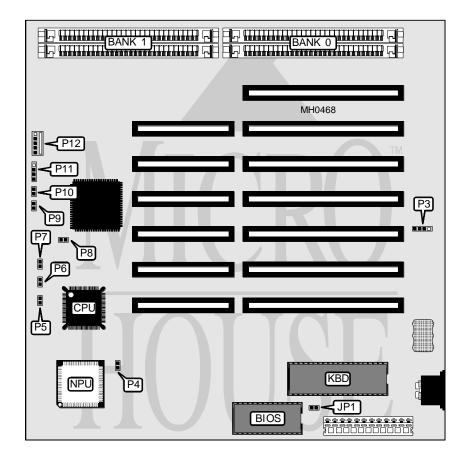

CONNECTIONS					
Purpose	Location	Purpose	Location		
External battery	Р3	Reset switch	P10		
Turbo LED	P8	Speaker	P11		
Turbo switch	Р9	Power LED & keylock	P12		

Continued on next page . . .

UNIDENTIFIED C - 3 1 6 9 / C - 3 2 0 9

... continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select color	JP1	Closed		
Monitor type select monochrome	JP1	Open		
í NPU disabled	P4	Closed		
NPU enabled	P4	Open		
í DRAM mode select row/column	P5	Closed		
DRAM mode select page	P5	Open		
í Parity disabled	P6	Closed		
Parity enabled	P6	Open		
í DRAM wait state select 0 wait states	P7	Open		
DRAM wait state select 1 wait state	P7	Closed		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
1MB	(2) 256K x 9	(2) 256K x 9		
2MB	(2) 1M x 9	NONE		
4MB	(2) 1M x 9	(2) 1M x 9		
8MB	(2) 4M x 9	NONE		
16MB	(2) 4M x 9	(2) 4M x 9		