
## UNIDENTIFIED X'GOLDEN 386 (FULL SIZE)

Processor	80
Processor Speed	16
Chip Set	Ur
Max. Onboard DRAM	8N
Cache	No
BIOS	٨N
Dimensions	35
I/O Options	32
NPU Options	80

80386DX 16/20/25MHz Unknown 8MB None AMI 350mm x 304mm 32-bit external memory card slot 80287/80387

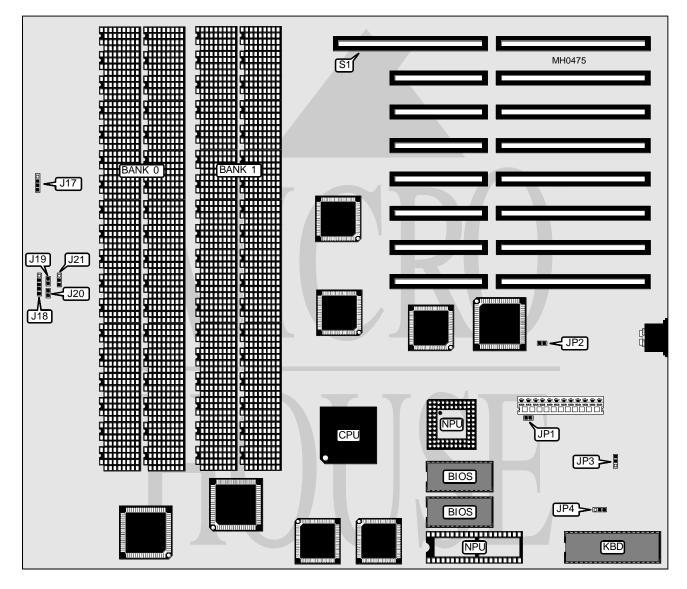

Continued on next page . . .

## UNIDENTIFIED X'GOLDEN 386 (FULL SIZE)

. . . continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J17	Turbo LED	J20
Power LED & keylock	J18	Turbo switch	J21
Reset switch	J19	32-bit external memory card	S1

USER CONFIGURABLE SETTINGS			
Function	Jumper	Position	
í Monitor type select monochrome	JP4	pins 2 & 3 closed	
Monitor type select color	JP4	pins 1 & 2 closed	

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
2MB	(36) 41256	(36) 41256		
8MB	(36) 411000	(36) 411000		

NPU CONFIGURATION			
Туре	JP1	JP2	JP3
NONE	Open	Open	Open
80287	Open	Open	Closed
80387	Closed	Closed	Closed