


BEAVER COMPUTER CORPORATION

486DX CACHE

Processor	80486DX
Processor Speed	33MHz
Chip Set	TI
Max. Onboard DRAM	32MB
Cache	128KB
BIOS	AMI/Award
Dimensions	323mm x 222mm
I/O Options	None
NPU Options	4167

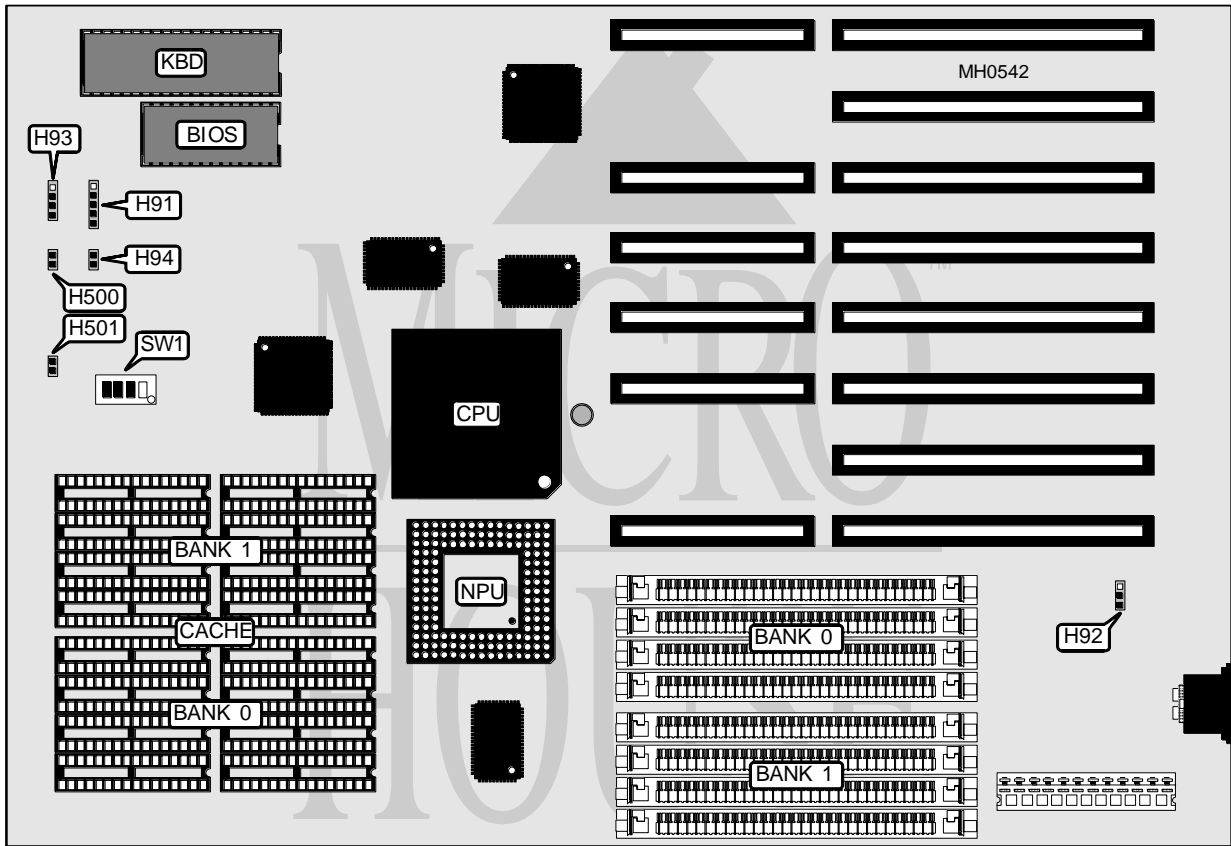

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	H91	Reset switch	H94
External battery	H92	Turbo LED	H500
Speaker	H93	Turbo switch	H501
Note: The location of jumper H501 is unidentified.			

Continued on next page . . .

BEAVER COMPUTER CORPORATION

486DX CACHE

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Monitor type select color	SW1/1	On
Monitor type select monochrome	SW1/1	Off
í Factory configured - do not alter	SW1/3	N/A
í Factory configured - do not alter	SW1/4	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1 M x 9
5MB	(4) 1 M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 256K x 9	(4) 4M x 9
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
64KB	(8) 8K x 8	NONE
128KB	(8) 8K x 8	(8) 8K x 8

CACHE SWITCH CONFIGURATION	
Size	SW1/2
64KB	On
128KB	Off