


MICRO EXPRESS, INC.

FOREX 386/486

Processor	80386DX/CX486DLC/80486SX/80487SX/80486DX/80486DX2
Processor Speed	20/25/33/40/50(internal)/66(internal)MHz
Chip Set	Forex
Max. Onboard DRAM	32MB
Cache	64/128/256KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387

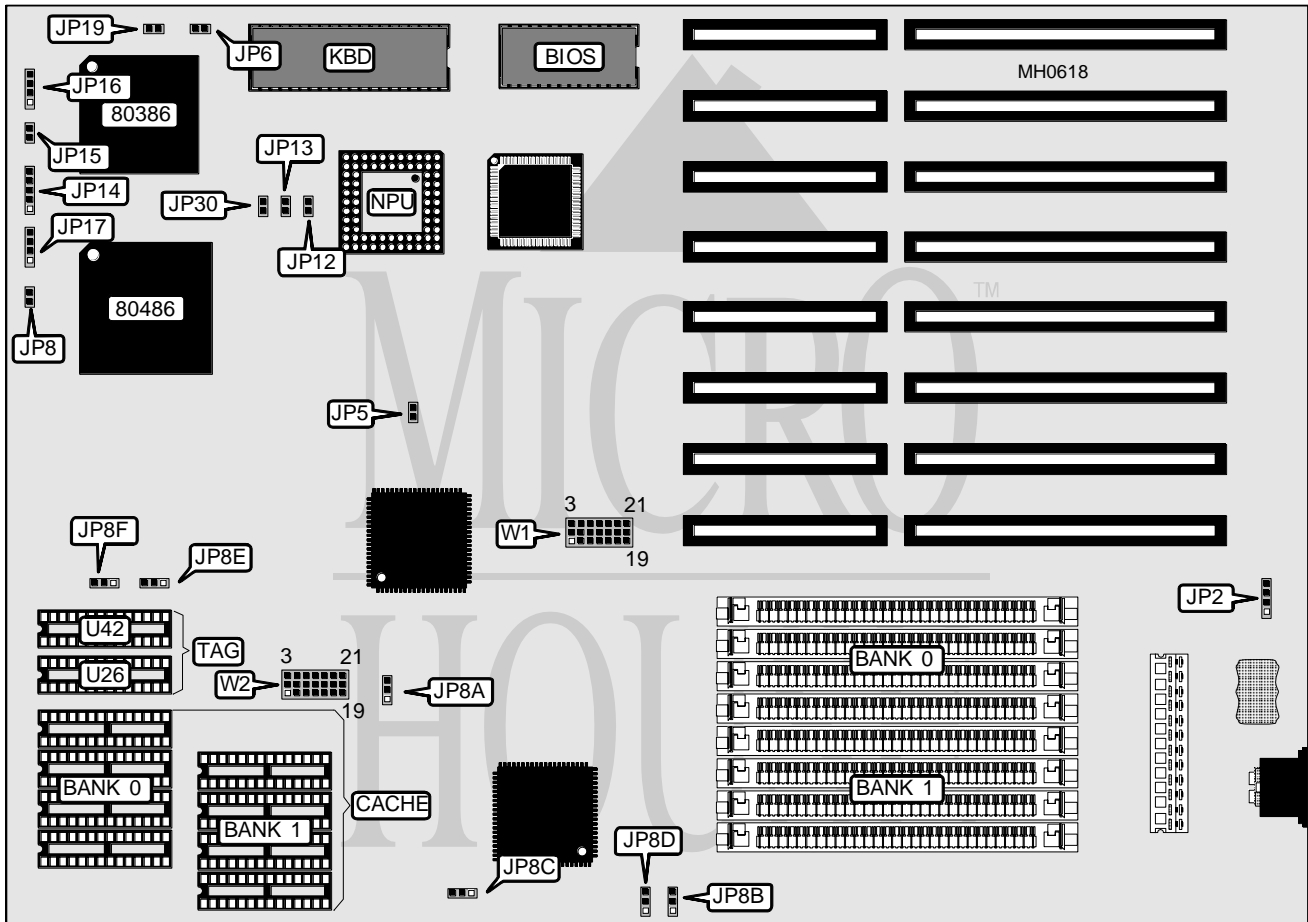

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	JP2	Turbo switch	JP15
Reset switch	JP8	Turbo LED	JP16
Power LED & keylock	JP14	Speaker	JP17

Continued on next page . . .

MICRO EXPRESS, INC.

FOREX 386/486

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Parity check enabled	JP5	Closed
Parity check disabled	JP5	Open
Monitor type select color	JP6	Open
Monitor type select monochrome	JP6	Closed
í Factory configured - do not alter	JP19	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG (U26)	TAG (U42)
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8	NONE
128KB	(4) 32K x 8	NONE	(1) 8K x 8	NONE
256KB	(4) 32K x 8	(4) 32K x 8	(1) 8K x 8	(1) 8K x 8

CACHE JUMPER CONFIGURATION						
Size	JP8A	JP8B	JP8C	JP8D	JP8E	JP8F
64KB	2 & 3	2 & 3	1 & 2	2 & 3	2 & 3	1 & 2
128KB	1 & 2	2 & 3	1 & 2	1 & 2	1 & 2	1 & 2
256KB	2 & 3	1 & 2	2 & 3	2 & 3	1 & 2	2 & 3

Note: Pins designated should be in the closed position.

CPU TYPE CONFIGURATION	
Type	W1 & W2
80386DX	2 & 3, 5 & 6, 8 & 9, 11 & 12, 14 & 15, 17 & 18, and 20 & 21
80486DLC	1 & 2, 4 & 5, 7 & 8, 10 & 11, 13 & 14, 16 & 17, and 19 & 20
80486SX	1 & 2, 4 & 5, 7 & 8, 10 & 11, 13 & 14, 16 & 17, and 19 & 20
80487SX	1 & 2, 4 & 5, 7 & 8, 10 & 11, 13 & 14, 16 & 17, and 19 & 20
80486DX	1 & 2, 4 & 5, 7 & 8, 10 & 11, 13 & 14, 16 & 17, and 19 & 20
80486DX2	1 & 2, 4 & 5, 7 & 8, 10 & 11, 13 & 14, 16 & 17, and 19 & 20

Notes: Pins designated should be in the closed position.

Continued on next page . . .

MICRO EXPRESS, INC.
FOREX 386/486

... continued from previous page

CPU TYPE CONFIGURATION (CON'T)			
Type	JP12	JP13	JP30
80386DX	N/A	N/A	N/A
80486DLC	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
80486SX	pins 2 & 3 closed	pins 2 & 3 closed	N/A
80487SX	pins 1 & 2 closed	pins 1 & 2 closed	pins 2 & 3 closed
80486DX	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed
80486DX2	pins 1 & 2 closed	pins 1 & 2 closed	pins 1 & 2 closed