


UNIDENTIFIED

286 - 16

Processor	80286
Processor Speed	16MHz
Chip Set	Unidentified
Max. Onboard DRAM	4MB
Cache	None
BIOS	Unidentified
Dimensions	272mm x 218mm
I/O Options	None
NPU Options	80287

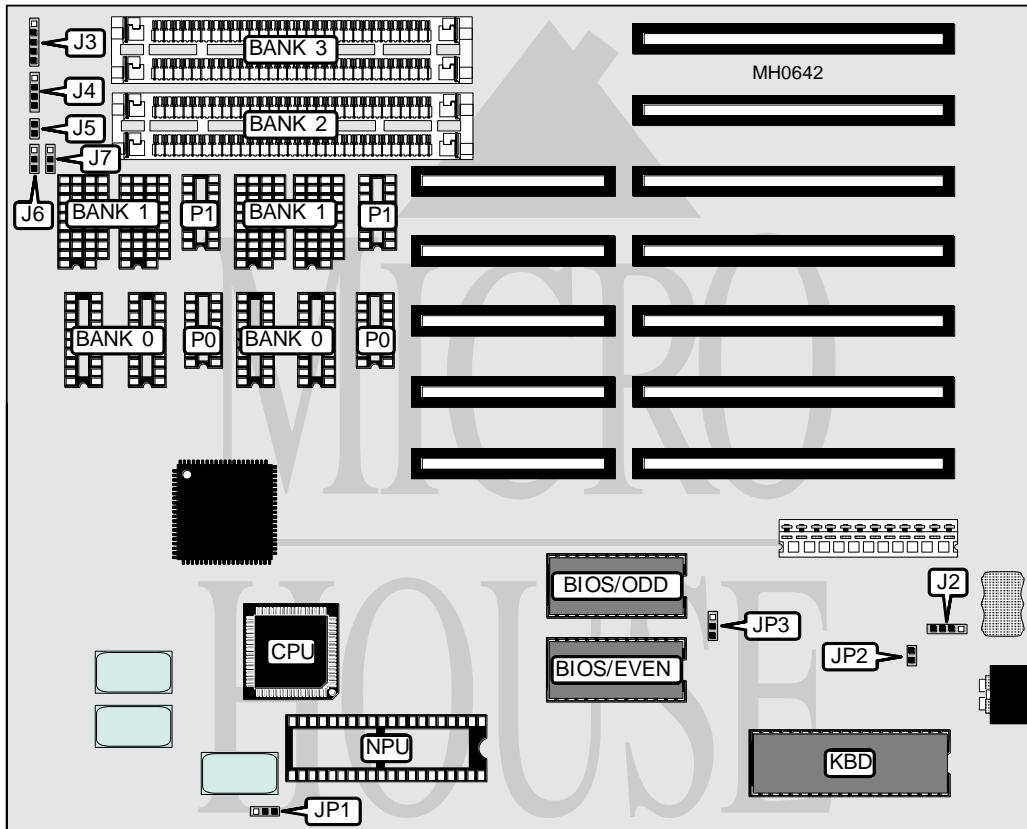

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Reset switch	J5
Power LED & keylock	J3	Turbo LED	J6
Speaker	J4	Turbo switch	J7

Continued on next page . . .

UNIDENTIFIED

286-16

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í NPU clock select external	JP1	pins 2 & 3 closed
NPU clock select internal	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
í BIOS type select 27256	JP3	pins 1 & 2 closed
BIOS type select 27128	JP3	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0	P 0	Bank 1	P 1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
512KB	NONE	NONE	NONE	NONE	(2) 256K x 9	NONE
640KB	(4) 44256	(2) 41256	(4) 4464	(2) 4164	NONE	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
1MB	NONE	NONE	NONE	NONE	(2) 256K x 9	(2) 256K x 9
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9