


DATAEXPERT CORPORATION

OPTI-386

Processor	80386DX
Processor Speed	25/33MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80387/3167

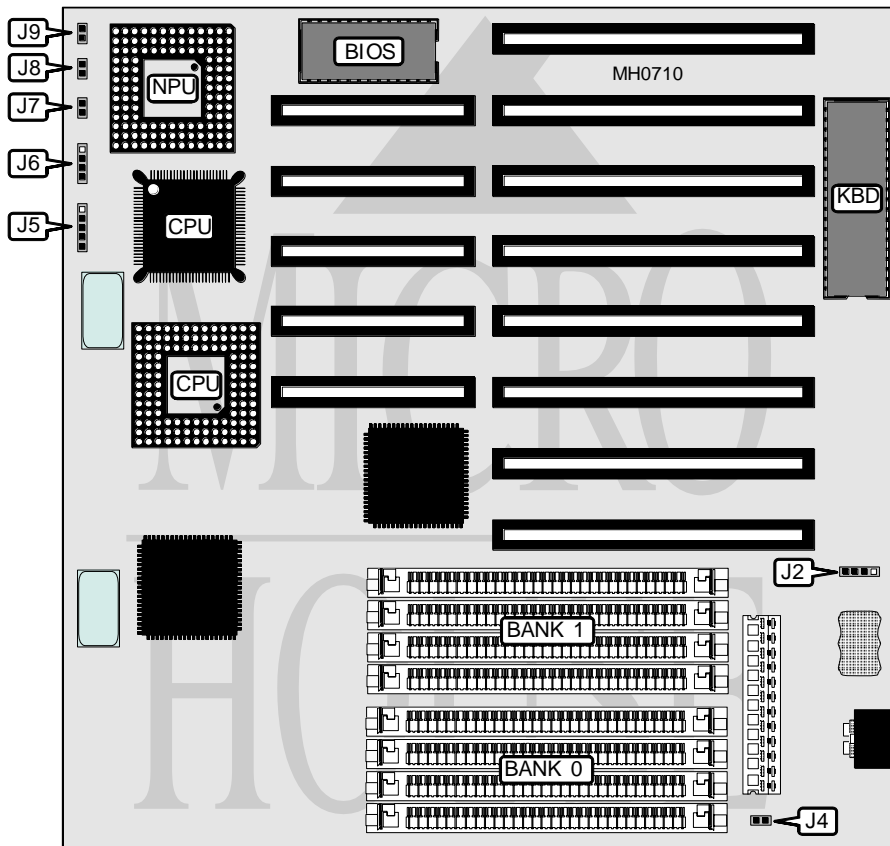

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Reset switch	J7
Power LED & keylock	J5	Turbo switch	J8
Speaker	J6	Turbo LED	J9

Note: Board may have either the AMD surface mounted CPU or an Intel-type socketed 80386 CPU.

Continued on next page . . .

DATAEXPERT CORPORATION

OPTI-386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	J4	Closed
Monitor type select monochrome	J4	Open
Note: The location of J4 is unidentified.		

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
32MB	(4) 4M x 9	(4) 4M x 9