


COMPAQ COMPUTER CORPORATION PORTABLE (PLUS) (MODEL 000383)

Processor 8088
Processor Speed 4.77MHz
Chip Set None
Max. Onboard DRAM 640KB
Cache None
BIOS Compaq
Dimensions 372mm x 180mm
I/O Options None
NPU Options 8087

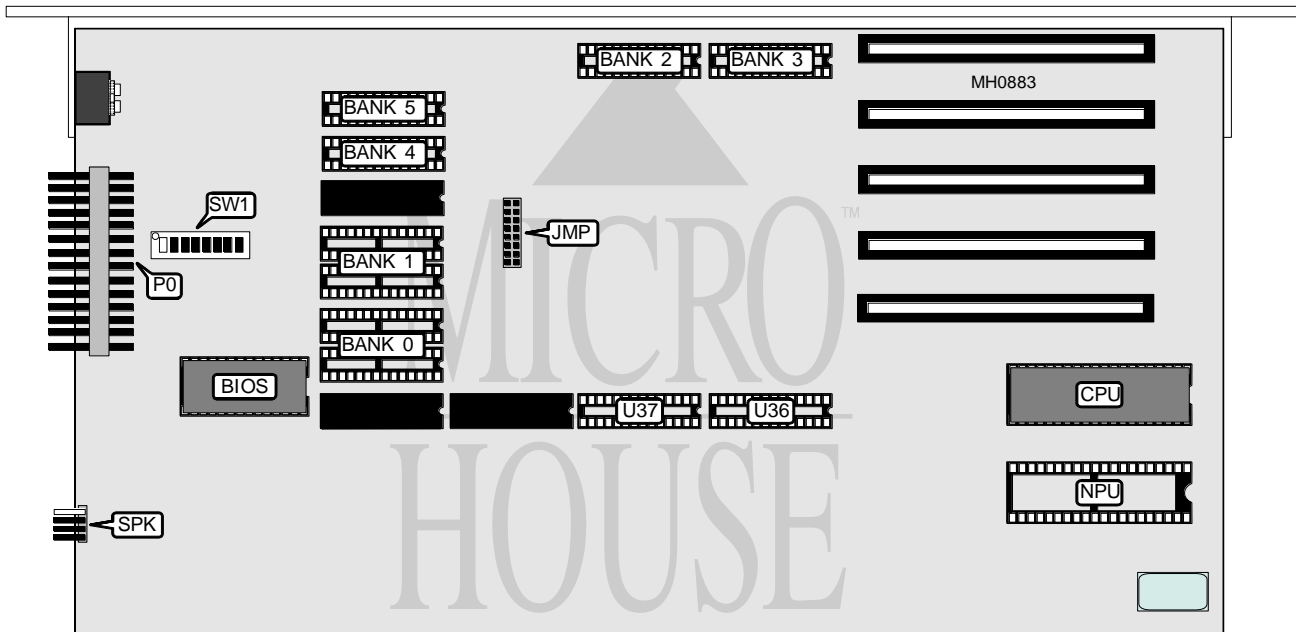

CONNECTIONS			
Purpose	Location	Purpose	Location
Main power	P0	Speaker	SPK

Continued on next page . . .

COMPAQ COMPUTER CORPORATION

PORTABLE (PLUS) (MODEL 000383)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Factory configured - do not alter	SW1/1	Off
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off
í Factory configured - do not alter	SW1/3	Off
í Factory configured - do not alter	SW1/4	Off

DRAM CONFIGURATION								
Size	Bank 0	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5	U36	U37
128KB	(2) 4464	(2) 4464	NONE	NONE	NONE	NONE	NONE	(1) 4164
192KB	(2) 4464	(2) 4464	(1) 4464	(1) 4464	NONE	NONE	NONE	(1) 4164
256KB	(2) 4464	(2) 4464	(1) 4464	(1) 4464	(1) 4464	(1) 4464	(1) 4164	(1) 4164
384KB	(2) 4464	(2) 4464	(1)44256	(1)44256	NONE	NONE	(1) 4164	(1) 4164
640KB	(2) 4464	(2) 4464	(1)44256	(1)44256	(1)44256	(1)44256	(1) 4164	(1) 4164

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW1/7	SW1/8
1	On	On
2	On	Off
3	Off	On
4	Off	Off

MONITOR CONFIGURATION		
Type	SW1/5	SW1/6
80 x 25 color (Compaq VDU)	On	Off
40 x 25 color (Compaq VDU)	Off	On
80 x 25 color (EGA or RGBI)	On	On
Monochrome	Off	Off