


DELL COMPUTER CORPORATION

286 - 8/10/12 SYSTEM

Processor 80286
Processor Speed 6/8/10/12MHz
Chip Set C & T
Max. Onboard DRAM 1MB
Cache None
BIOS Phoenix
Dimensions 334mm x 218mm
I/O Options None
NPU Options 80287

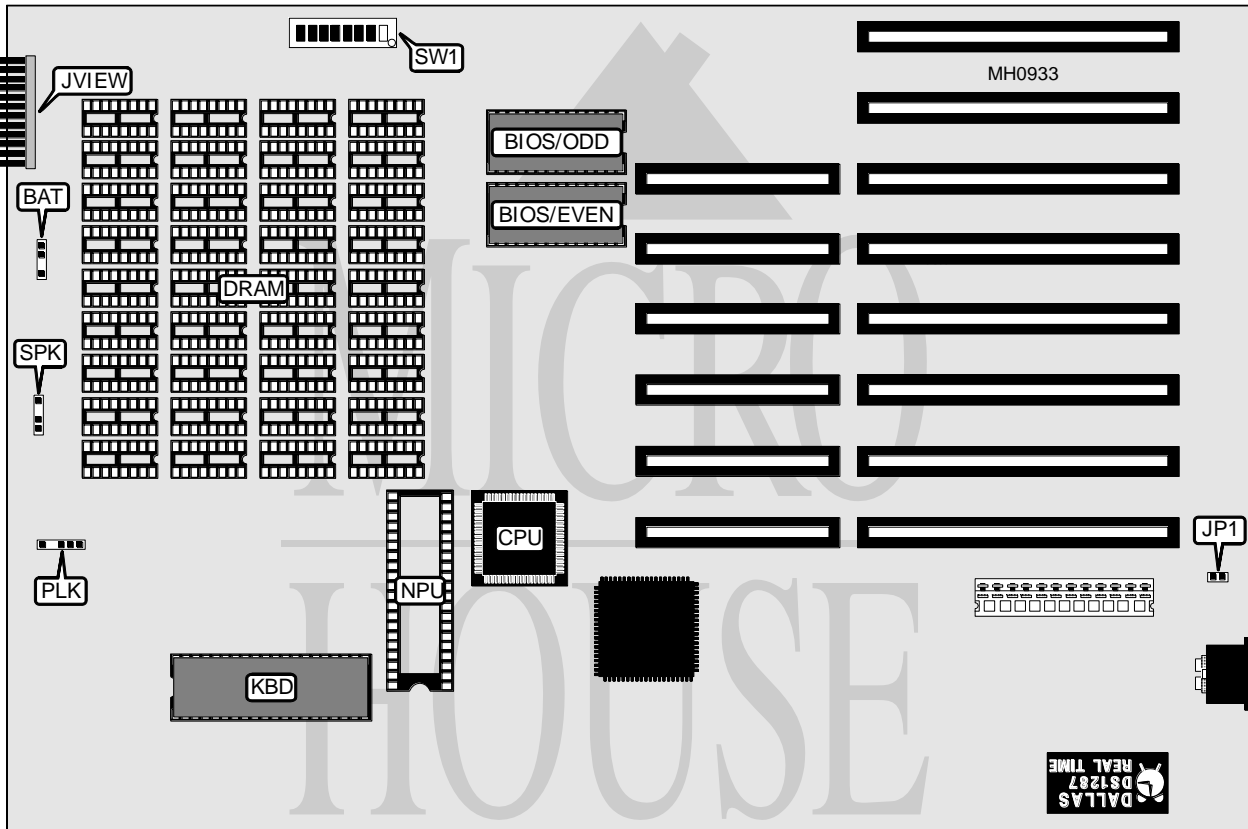

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	BAT	Speaker	SPK
Power LED & keylock	PLK	Front panel status LCD	JVIEW

Continued on next page . . .

DELL COMPUTER CORPORATION

286 - 8/10/12 SYSTEM

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Factory configured - do not alter	JP1	N/A
í Monitor type select monochrome	SW1/1	Off
Monitor type select color	SW1/1	On
í Front panel LED (green) select power indicator	SW1/2	Off
Front panel LED (green) select CPU speed indicator	SW1/2	On
í BIOS type select 27256	SW1/3	On
BIOS type select 27128	SW1/3	Off
í Maintenance mode disabled	SW1/4	Off
Maintenance mode enabled	SW1/4	On
í Factory configured - do not alter	SW1/5	Off

DRAM SWITCH CONFIGURATION			
DRAM Split	SW1/6	SW1/7	SW1/8
í 640KB base / 384KB extended	On	Off	Off
512KB base / 512KB extended	Off	Off	Off
System only recognizes 640KB of DRAM	Off	Off	On
System only recognizes 512KB of DRAM	Off	On	Off
System only recognizes 256KB of DRAM	Off	On	On

Note: System memory is factory configured at 1MB and is not alterable.