
UNIDENTIFIED BT-3MM

Processor 80386DX **Processor Speed** 16/20MHz C & T **Chip Set** Max. Onboard DRAM 2MB Cache None **BIOS** AMI/Phoenix **Dimensions** 384mm x 276mm

I/O Options 32-bit external memory card slot

NPU Options 80287

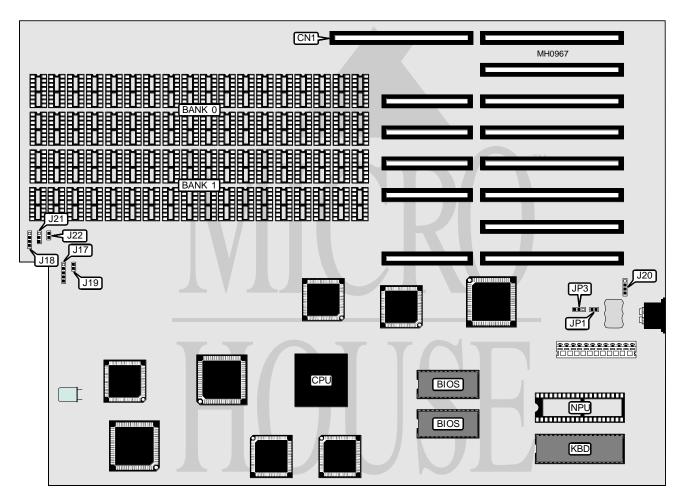

CONNECTIONS				
Purpose	Location	Purpose	Location	
32-bit external memory card	CN1	External battery	J20	
Power LED & keylock	J17	Turbo switch	J21	
Speaker	J18	Turbo LED	J22	
Reset switch	J19			

Continued on next page . . .

UNIDENTIFIED

BT-3MM

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í NPU disabled	JP1	Open		
NPU enabled	JP1	Closed		
í Monitor type select color	JP3	pins 1 & 2 closed		
Monitor type select monochrome	JP3	pins 2 & 3 closed		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
1MB	(36) 41256	NONE		
2MB	(36) 41256	(36) 41256		