


# HEWLETT-PACKARD COMPANY

## HP VECTRA QS/16S

**Processor** 80386SX  
**Processor Speed** 16MHz  
**Chip Set** HP  
**Max. Onboard DRAM** 8MB  
**Cache** None  
**BIOS** HP  
**Dimensions** 334mm x 128mm  
**I/O Options** 16-bit proprietary backplane ports (2)  
**NPU Options** 80387SX

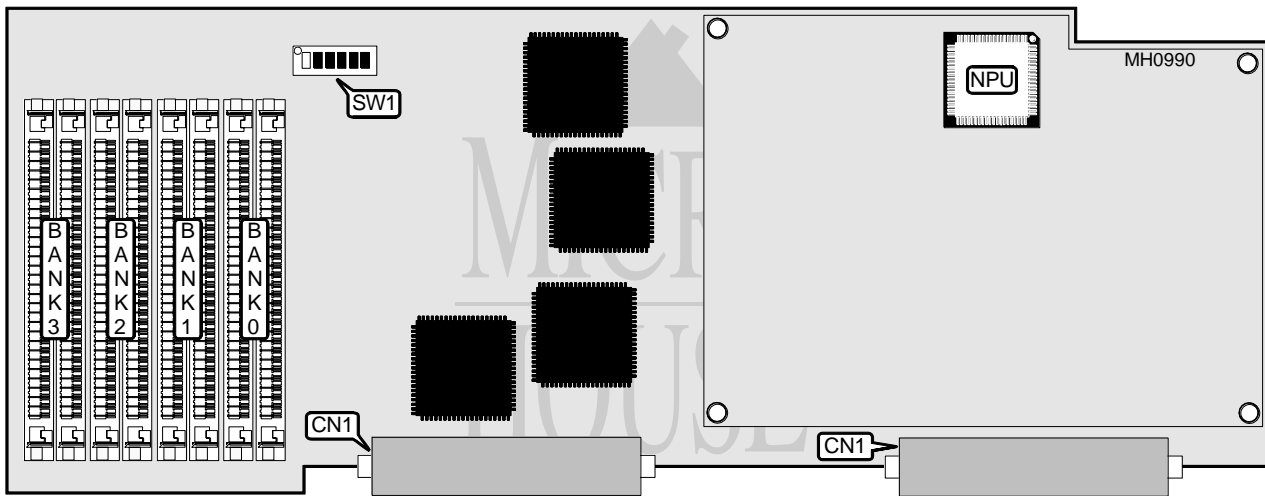

CONNECTIONS	
Purpose	Location
16-bit proprietary backplane ports	CN1

*Continued on next page . . .*

# HEWLETT-PACKARD COMPANY

## HP VECTRA QS/16S

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í NPU enabled	SW1/1	Off
NPU disabled	SW1/1	On
í Bus speed select asynchronous (8MHz)	SW1/2	On
Bus speed select synchronous with CPU (8MHz)	SW1/2	Off
í Base memory size select 640KB	SW1/3	On
Base memory size select 512KB	SW1/3	Off
í Optional ROM enabled	SW1/4	On
Optional ROM disabled	SW1/4	Off
í Factory configured - do not alter	SW1/5	On
í NPU mode select synchronous with CPU	SW1/6	On
NPU mode select asynchronous with CPU	SW1/6	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9