UNIDENTIFIED


AC 486 MODEL PQFP

80486SX/80487SX/80486DX/80486DX2 **Processor Processor Speed** 16/20/25/33/50(internal)/66(internal)MHz

Chip Set ACC Max. Onboard DRAM 32MB Cache None **BIOS** AMI

254mm x 236mm **Dimensions**

I/O Options None **NPU Options** None

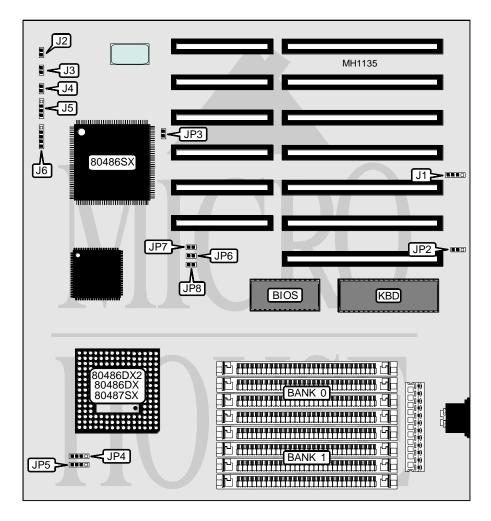

CONNECTIONS				
Purpose	Location	Purpose	Location	
External battery	J1	Reset switch	J4	
Turbo LED	J2	Speaker	J5	
Turbo switch	J3	Power LED & keylock	J6	

Continued on next page . . .

UNIDENTIFIED

AC 486 MODEL PQFP

. . . continued from previous page

USER CONFIGURABLE SETTINGS				
Function	Jumper	Position		
í Monitor type select monochrome	JP2	pins 1 & 2 closed		
Monitor type select color	JP2	pins 2 & 3 closed		

	DRAM CONFIGURATION	
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CPU TYPE CONFIGURATION				
Туре	JP3	JP4	JP5	
80486SX	Open	pins 2 & 3 closed	pins 2 & 3 closed	
80487SX	Closed	pins 1 & 2, 3 & 4 closed	pins 3 & 4 closed	
80486DX	Closed	pins 1 & 2, 3 & 4 closed	pins 1 & 2 closed	
80486DX2	Closed	pins 1 & 2, 3 & 4 closed	pins 1 & 2 closed	

CPU SPEED CONFIGURATION					
Speed	JP6	JP7	JP8		
16MHz	Closed	Closed	Closed		
20MHz	Open	Closed	Closed		
25MHz	Closed	Open	Closed		
33MHz	Closed	Closed	Open		
50iMHz	Closed	Open	Closed		
66iMHz	Closed	Closed	Open		