


# BEC COMPUTER ENTERPRISE PRECISION 286-12/16

<b>Processor</b>	80286
<b>Processor Speed</b>	12/16MHz
<b>Chip Set</b>	ACER
<b>Max. Onboard DRAM</b>	4MB
<b>SRAM Cache</b>	None
<b>BIOS</b>	AMI
<b>Dimensions</b>	330.2mm x 218.4mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

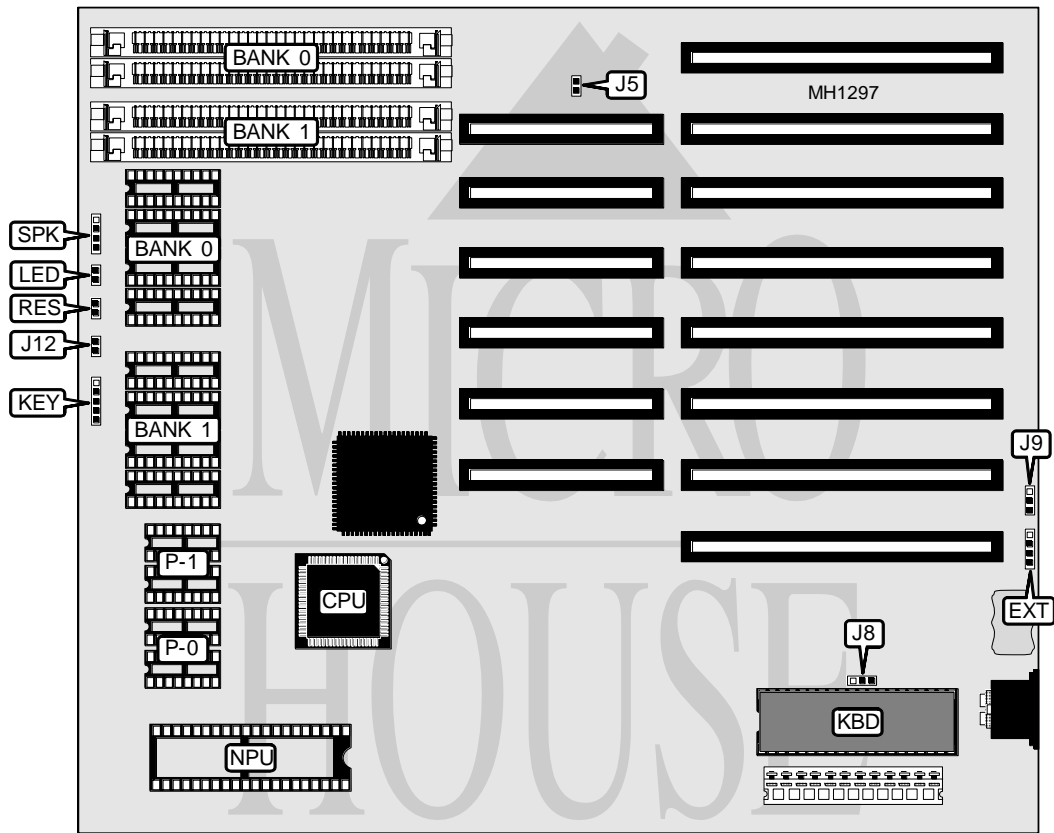

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	EXT	Reset switch	RES
Power LED & keylock	KEY	Turbo LED	LED
Turbo switch	J12	Speaker	SPK

Continued on next page . . .

# BEC COMPUTER ENTERPRISE PRECISION 286-12/16

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Parity check enabled	J5	open
Parity check disabled	J5	closed
í Monitor type select color	J8	pins 1 & 2 closed
Monitor type select monochrome	J8	pins 2 & 3 closed
í Battery select internal	J9	pins 1 & 2 closed
Battery select external	J9	pins 2 & 3 closed

DRAM CONFIGURATION						
Size	Bank 0(DIP)	P-0	Bank 1 (DIP)	P-1	Bank 0(SIMM)	Bank 1 (SIMM)
512KB	(4) 44256	(2) 41256	NONE	NONE	NONE	NONE
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	NONE	NONE
2MB	NONE	NONE	NONE	NONE	(2) 1M x 9	NONE
2.5MB	(4) 44256	(2) 41256	(4) 441000	(2) 41256	NONE	NONE
4MB	(4) 441000	(2) 41256	(4) 441000	(2) 41256	NONE	NONE
4MB	NONE	NONE	NONE	NONE	(2) 1M x 9	(2) 1M x 9