


# MICROMEDIA TECHNOLOGIES, INC.

## 386 - A D

<b>Processor</b>	80386DX/CX486DLC
<b>Processor Speed</b>	33/40MHz
<b>Chip Set</b>	ALI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64/128/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	230mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387DX/3167

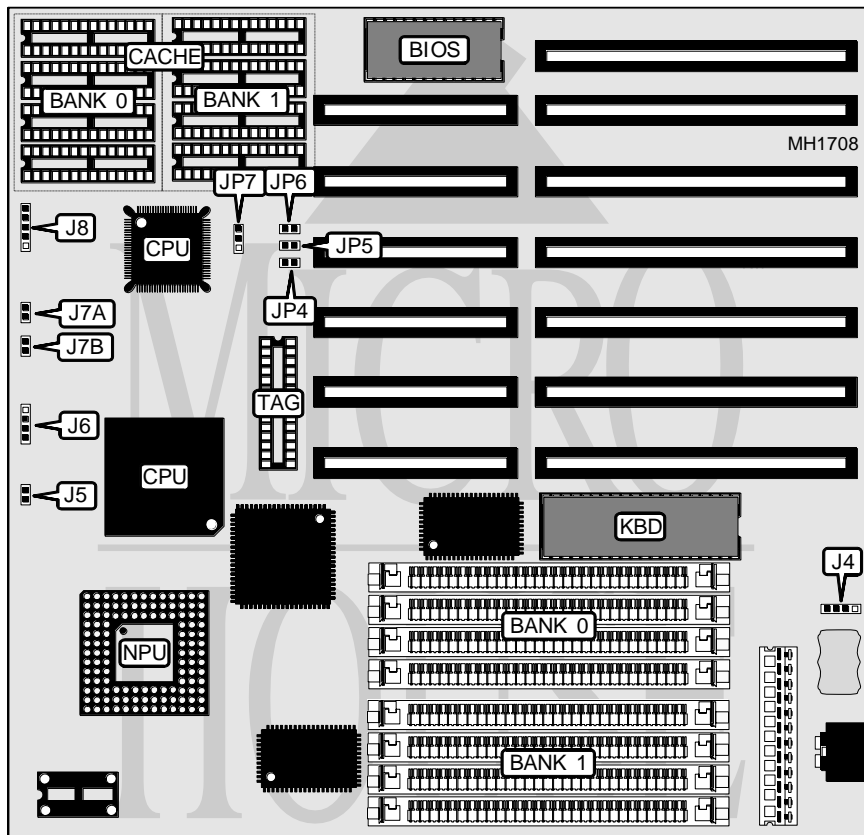

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo LED	J7A
Reset switch	J5	Turbo switch	J7B
Speaker	J6	Power LED & keylock	J8

Continued on next page . . .

**MICROMEDIA TECHNOLOGIES, INC.**  
**386 - A D**

... continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION				
Size	JP4	JP5	JP6	JP7
64KB	Open	Open	Open	Open
128KB	Closed	Closed	Open	pins 2 & 3 closed
256KB	Closed	Closed	Closed	pins 1 & 2 closed