LEADING EDGE PRODUCTS, INC. MODEL D3/25


80386DX **Processor Processor Speed** 25MHz **Chip Set** Unknown 8MB Max. Onboard DRAM Cache 32KB **BIOS** Phoenix

Dimensions 330mm x 218mm

16-bit external memory card slot, bus mouse port, floppy drive interface (2), I/O Options

IDE interface, parallel port, serial ports (2)

NPU Options 80387DX

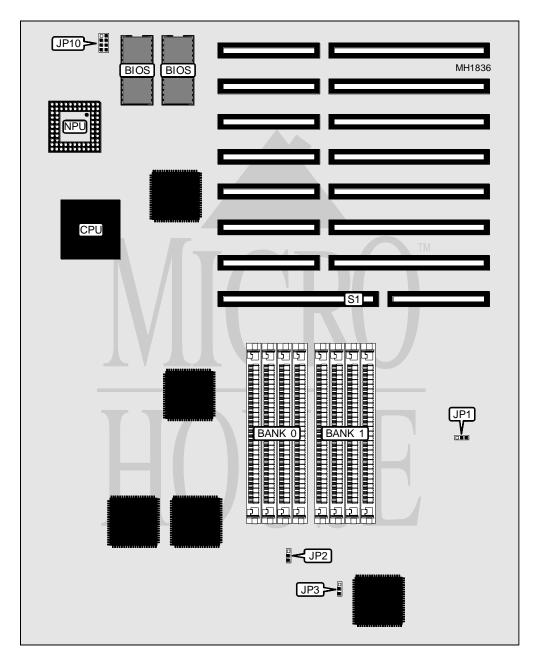

Continued next page...

LEADING EDGE PRODUCTS, INC. MODEL D3/25

. . . continued from previous page.

CONNECTIONS				
Purpose	Location	Purpose	Location	
Bus mouse port	J11	Reset switch/LED	JP7	
Serial port 1	J12	Keylock	JP8	
Serial port 2	J13	Floppy drive interface	J23	
Parallel port	J14	Floppy drive interface	J24	
Speaker	J15	16-bit external memory card slot	S1	
Note: The exact locations of J11 - J	15, JP7, JP8, JP23 a	nd JP24 are unknown.	•	

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	J1	pins 2 & 3 closed
Monitor type select color	J1	pins 1 & 2 closed
í Floppy drive interface enabled	J3	Closed
Floppy drive interface disabled	J3	Open
í NPU disabled	J10	pins 7 & 8 closed
NPU enabled	J10	pins 5 & 6 closed
í Bus mouse port enabled	JPA	Closed
Bus mouse port disabled	JPA	Open
í Factory configured - do not alter	JP1	N/A
í Factory configured - do not alter	JP2	N/A
í Factory configured - do not alter	JP3	N/A
í Factory configured - do not alter	JP11	Open
í Factory configured - do not alter	JP12	Closed
í Factory configured - do not alter	JP13	Closed
í Factory configured - do not alter	JP14	Closed
Note: The exact locations of J1, J3, J10, JPA, JP12, JP13, and JP14 are unknown.		

DRAM CONFIGURATION				
Size	Bank 0	Bank 1		
4MB	(4) 1M x 9	NONE		
8MB	(4) 1M x 9	(4) 1M x 9		
16MB	(4) 4M x 9	NONE		
Note: The exact locations of Bank 0 and Bank 1 are unknown.				

EXTERNAL MEMORY CONFIGURATION				
Size	JP10/pins 1 & 2	JP10/pins 3 & 4		
4MB	Closed	Open		
8MB	Open	Closed		
16MB	Closed	Closed		

BUS MOUSE IRQ INTERRUPT SELECT				
IRQ	J2			
í IRQ5	pins 1 & 5 closed			
IRQ3	pins 2 & 6 closed			
IRQ4	pins 3 & 7 closed			
IRQ9	pins 4 & 8 closed			
Note: The exact location of J2 is unknown.				