


UNIDENTIFIED 10MHZ/8MHZ SYSTEM BOARD

Processor	8088
Processor Speed	8/10MHz
Chip Set	Unidentified
Max. Onboard DRAM	640KB
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	8087

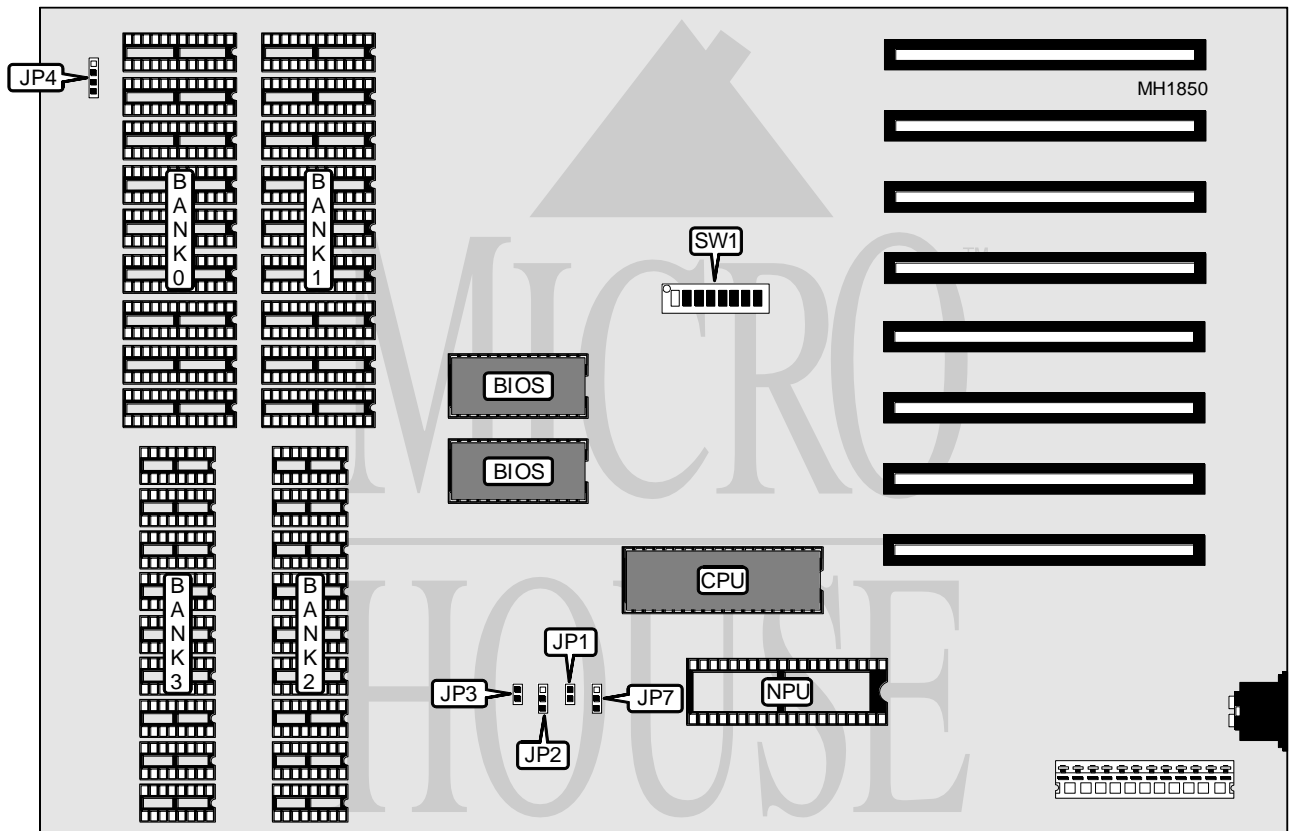

CONNECTIONS			
Purpose	Location	Purpose	Location
Reset switch	JP1	Speaker	JP4
Keylock	JP2	Power LED	JP7
Turbo LED	JP3		

Continued next page...

UNIDENTIFIED 10MHZ/8MHZ SYSTEM BOARD

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
NPU enabled	SW1/2	Off
NPU disabled	SW1/2	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256K	(9) 41256	NONE	NONE	NONE
512K	(9) 41256	(9) 41256	NONE	NONE
640K	(9) 41256	(9) 41256	(9) 4164	(9) 4164

DRAM JUMPER CONFIGURATION		
Size	SW1/3	SW1/4
None	On	On
256KB	Off	Off
512KB	On	Off
640KB	Off	On

CPU SPEED CONFIGURATION	
Speed	SW1/1
4.77MHz	Off
8MHz	On
10MHz	On

MONITOR TYPE SELECTION		
Type	SW1/5	SW1/6
None	On	On
Color 40 x 20	Off	On
Color 80 x 25	On	Off
Monochrome or both	Off	Off

FLOPPY DRIVE CONFIGURATION		
Number of drives	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off