


HEWLETT-PACKARD COMPANY

HP NETSERVER LF


Processor	80486DX4/Pentium
Processor Speed	66MHz Pentium/100(internal)MHz 80486DX4
Chip Set	Hewlett Packard
Max. Onboard DRAM	136MB (80486DX4) or 192MB (Pentium)
Cache	256KB (non-configurable, location unknown)
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	CPU card slot, floppy drive interface, IDE interface, parallel port, serial ports (2), SCSI ports (2), VGA port
NPU Options	None

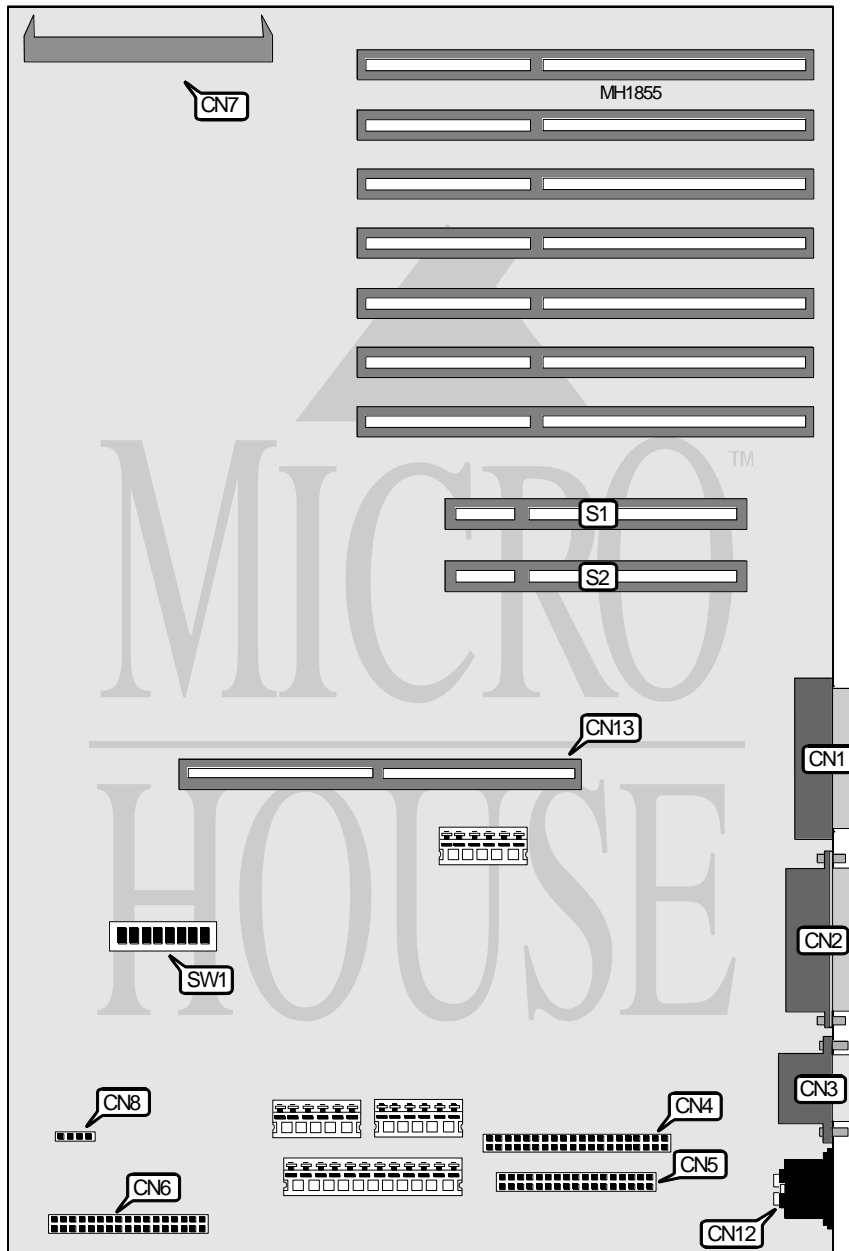

Continued on next page. . .

HEWLETT-PACKARD COMPANY HP NETSERVER LF

...continued from previous page

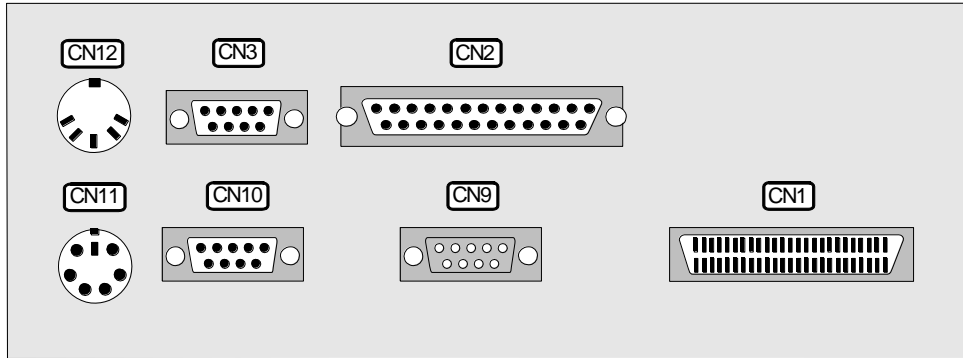

CONNECTIONS			
Purpose	Location	Purpose	Location
External SCSI interface	CN1	15-pin analog video port	CN9
Parallel port	CN2	Serial port 1	CN10
Serial port 2	CN3	Bus mouse port	CN11
IDE interface	CN4	Keyboard connector	CN12
Floppy drive interface	CN5	CPU card slot	CN13
Control panel cable connector	CN6	PCI slot	S1
Internal SCSI interface	CN7	PCI slot	S2
Clock battery connector	CN8		


USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í BIOS configurable select	SW1/1	On
BIOS not configurable	SW1/1	Off
í Factory configured-do not alter	SW1/2	On
í Current system CMOS & NVRAM save configuration	SW1/3	On
Current system CMOS & NVRAM erase configuration	SW1/3	Off
í Current system CMOS & NVRAM configurable	SW1/4	On
Current system CMOS & NVRAM not configurable	SW1/4	Off
í Password enabled	SW1/5	On
Password clear	SW1/5	Off
í SMI interrupt disabled	SW1/6	Off
SMI interrupt enabled	SW1/6	On
í I/O controller enabled	SW1/7	On
I/O controller disabled	SW1/7	Off
í Onboard video adapter enabled	SW1/8	On
Onboard video adapter disabled	SW1/8	Off

Continued on next page...


HEWLETT-PACKARD COMPANY
HP NETSERVER LF

continued from previous page. . .

80486DX4 PROCESSOR BOARD

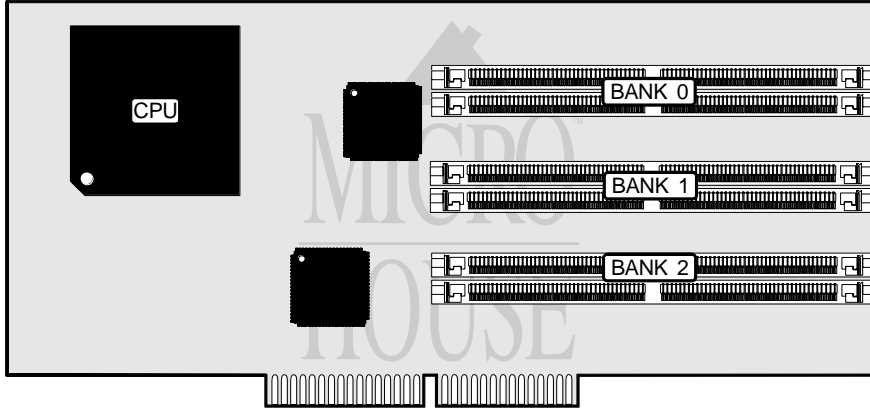

PENTIUM PROCESSOR BOARD

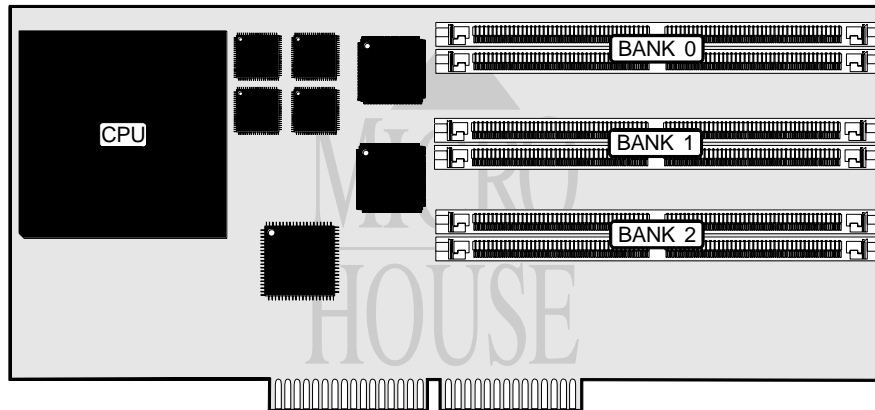

DRAM CONFIGURATION 80486 PROCESSOR BOARD

Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	NONE	NONE
16MB	(2) 1M x 36	(2) 1M x 36	NONE
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
40MB	(2) 1M x 36	(2) 4M x 36	NONE
74MB	(2) 1M x 36	(2) 4M x 36	(2) 4M x 36
136MB	(2) 1M x 36	(2) 16M x 36	NONE

Continued on next page. . .

HEWLETT-PACKARD COMPANY

HP NETSERVER LF

continued from previous page. . .

DRAM CONFIGURATION PENTIUM PROCESSOR BOARD			
Size	Bank 0	Bank 1	Bank 2
16MB	(2) 2M x 36	NONE	NONE
32MB	(2) 2M x 36	(2) 2M x 36	NONE
32MB	(2) 4M x 36	NONE	NONE
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
48MB	(2) 2M x 36	(2) 4M x 36	NONE
64MB	(2) 2M x 36	(2) 2M x 36	(2) 4M x 36
80MB	(2) 2M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 16M x 36	NONE	NONE
144MB	(2) 16M x 36	(2) 2M x 36	NONE
160MB	(2) 16M x 36	(2) 2M x 36	(2) 2M x 36
160MB	(2) 16M x 36	(2) 4M x 36	NONE
192MB	(2) 16M x 36	(2) 4M x 36	(2) 4M x 36