


OLIVETTI M 4 8 6

Processor	80486DX/i860
Processor Speed	25MHz
Chip Set	C & T
Max. Onboard DRAM	64MB
Cache	None
BIOS	Olivetti
Dimensions	330mm x 218mm
I/O Options	Parallel port, PS/2 mouse port, serial port
NPU Options	4167

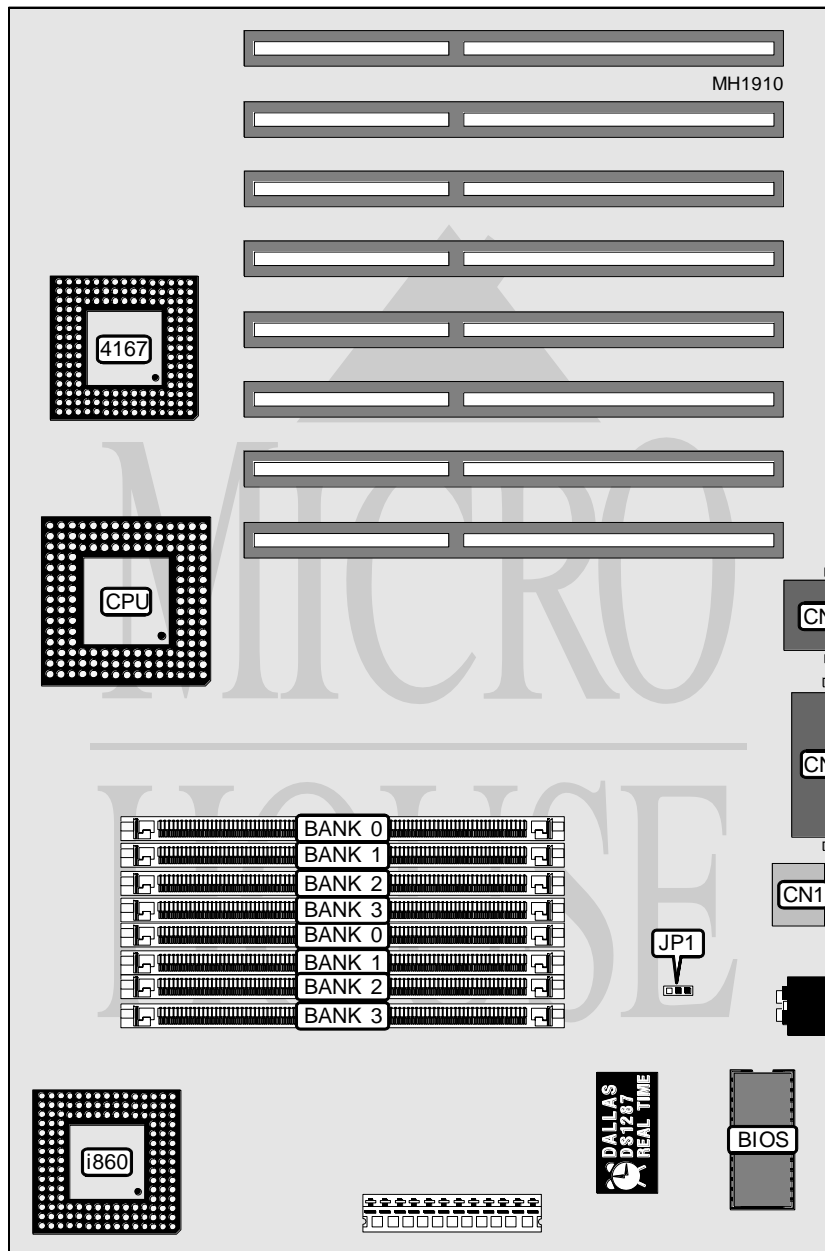

Continued next page...

OLIVETTI

M 4 8 6

... continued from previous page.

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Serial port	CN3
Parallel port	CN2		

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Password disabled	JP1	Closed
Password enabled	JP1	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
2MB	(2) 256K x 36	NONE	NONE	NONE
4MB	(2) 256K x 36	(2) 256K x 36	NONE	NONE
6MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	NONE
8MB	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
8MB	(2) 1M x 36	NONE	NONE	NONE
10MB	(2) 1M x 36	(2) 256K x 36	NONE	NONE
12MB	(2) 1M x 36	(2) 256K x 36	(2) 256K x 36	NONE
14MB	(2) 1M x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
16MB	(2) 1M x 36	(2) 1M x 36	NONE	NONE
18MB	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36	NONE
20MB	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36	(2) 256K x 36
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	NONE
26MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36
28MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE	NONE	NONE
34MB	(2) 4M x 36	(2) 256K x 36	NONE	NONE
36MB	(2) 4M x 36	(2) 256K x 36	(2) 256K x 36	NONE
38MB	(2) 4M x 36	(2) 256K x 36	(2) 256K x 36	(2) 256K x 36
40MB	(2) 4M x 36	(2) 1M x 36	NONE	NONE
44MB	(2) 4M x 36	(2) 1M x 36	(2) 256K x 36	(2) 256K x 36
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36	NONE
50MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36	(2) 256K x 36
58MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
64MB	(2) 4M x 36	(2) 4M x 36	NONE	NONE