


# J-MARK COMPUTER CORPORATION 386P25

**Processor** 80386DX  
**Processor Speed** 25MHz  
**Chip Set** OPTI  
**Max. Onboard DRAM** 16MB (8MB on external memory card)  
**Cache** None  
**BIOS** AMI  
**Dimensions** 330mm x 218mm  
**I/O Options** 32-bit external memory card  
**NPU Options** 80387DX/3167

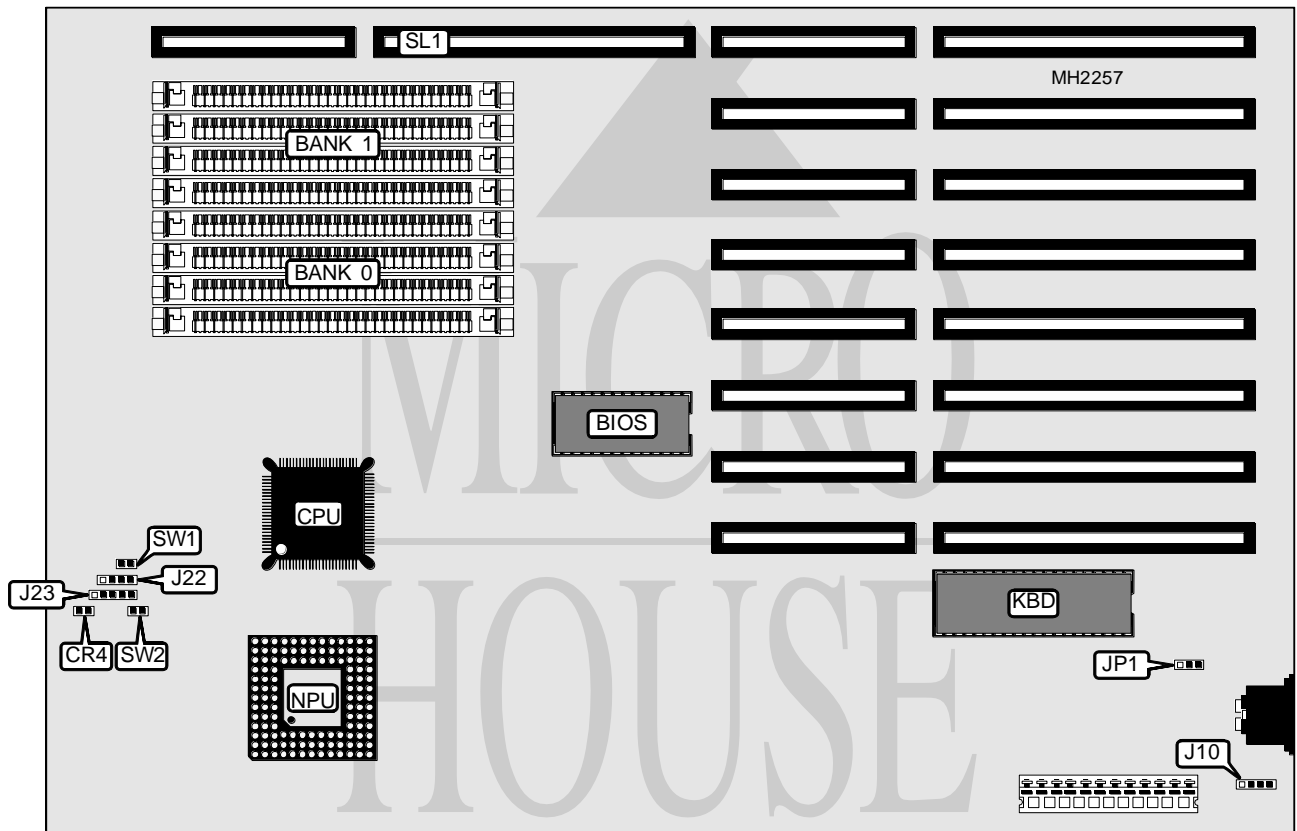

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	CR4	Reset switch	SW1
External battery	J10	Turbo switch	SW2
Speaker	J22	32-bit external memory card	SL1
Power LED & keylock	J23		

Continued next page. . .

# J-MARK COMPUTER CORPORATION

## 386P25

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome	JP1	pins 2 & 3 closed
Monitor type select color	JP1	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9