


UNIDENTIFIED

386SX-S NON CACHE MAINBOARD MODEL 3

Processor	80386SX/CX486SLC
Processor Speed	25/33/40MHz
Chip Set	Unidentified
Max. Onboard DRAM	16MB
Cache	None
BIOS	AMI
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	80387SX

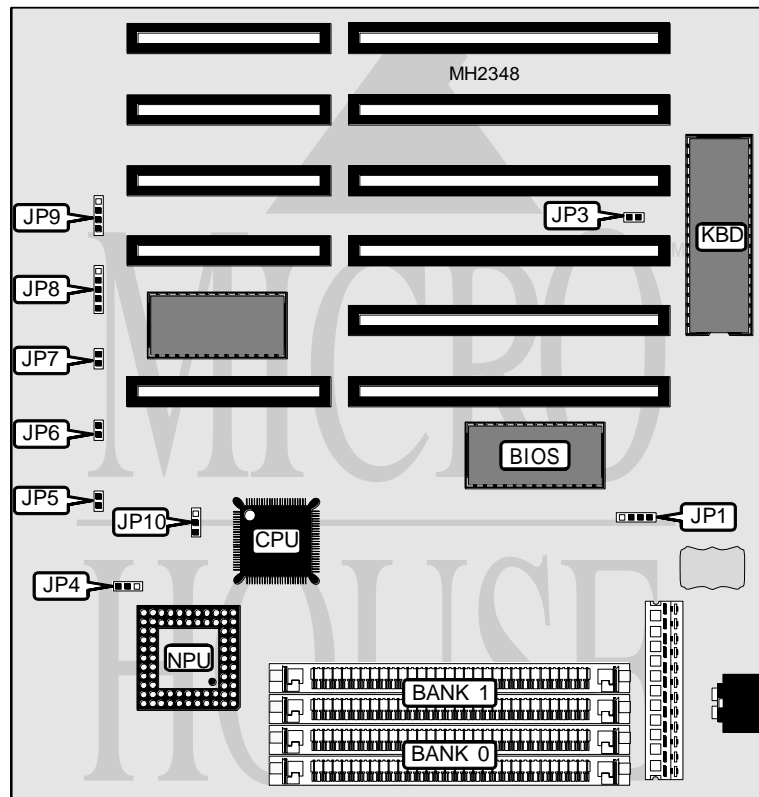

CONNECTIONS

Purpose	Location	Purpose	Location
External battery	JP1	Turbo LED	JP7
Turbo switch	JP5	Power LED & keylock	JP8
Reset switch	JP6	Speaker	JP9

Continued on next page. . .

UNIDENTIFIED

386SX-S NON CACHE MAINBOARD MODEL 3

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP3	Closed
Monitor type select monochrome	JP3	Open
í NPU synchronous with CPU	JP4	pins 1 & 2 closed
NPU asynchronous with CPU	JP4	pins 2 & 3 closed
í CPU speed select 40MHz	JP10	pins 1 & 2 closed
CPU speed select 33MHz	JP10	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9