


DELL COMPUTER CORPORATION PRECISION 386SX-16

Processor 80386SX
Processor Speed 16MHz
Chip Set Unidentified
Max. Onboard DRAM 4MB
Cache None
BIOS Unidentified
Dimensions 330mm x 218mm
I/O Options None
NPU Options 80387SX

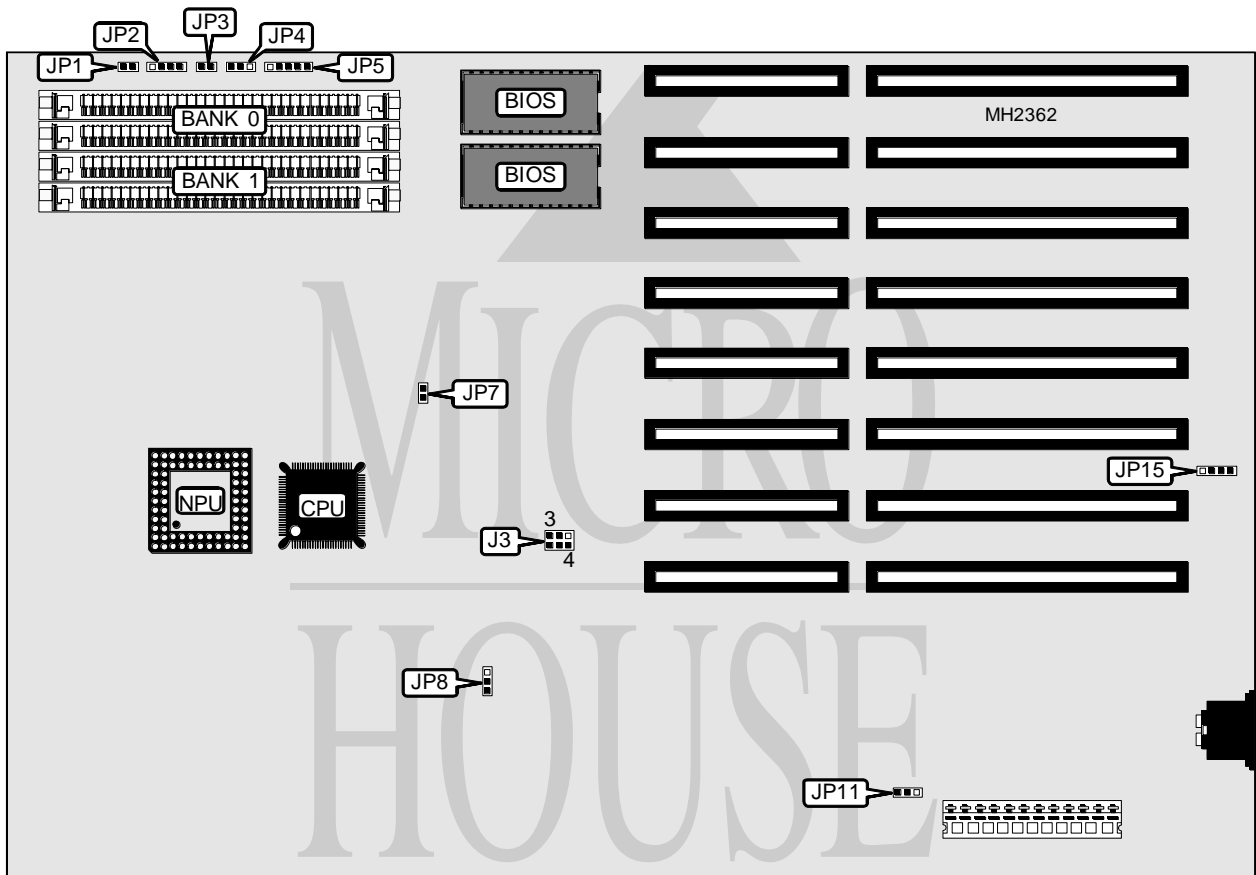

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	JP1	Turbo switch	JP4
Speaker	JP2	Power LED & keylock	JP5
Reset switch	JP3	External battery	JP15

Continued on next page. . .

DELL COMPUTER CORPORATION PRECISION 386SX-16

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Turbo enabled	JP4	pins 1 & 2 closed
Turbo disabled	JP4	pins 2 & 3 closed
í Parity check enabled	JP7	Closed
Parity check disabled	JP7	Open
í Wait state select 1 wait state	JP8	pins 2 & 3 closed
Wait state select 0 wait states	JP8	pins 1 & 2 closed
í Monitor type select monochrome	JP11	pins 1 & 2 closed
Monitor type select color	JP11	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	NONE
640KB	(2) 256K x 9	(2) 64K x 9
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9

DRAM JUMPER CONFIGURATION	
Size	J3
512KB	pins 1 & 2, 4 & 5 closed
640KB	pins 2 & 3, 4 & 5 closed
1MB	pins 1 & 2, 4 & 5 closed
2MB	pins 1 & 2, 5 & 6 closed
4MB	pins 1 & 2, 5 & 6 closed