


YOUNG MICROSYSTEMS, INC.

VEGA MB-VS433S

Processor 80486SX/80486DX
Processor Speed 16/20/25/33/50MHz
Chip Set Symphony
Max. Onboard DRAM 64MB
Cache 64/256KB
BIOS AMI
Dimensions 330mm x 218mm
I/O Options None
NPU Options 4167

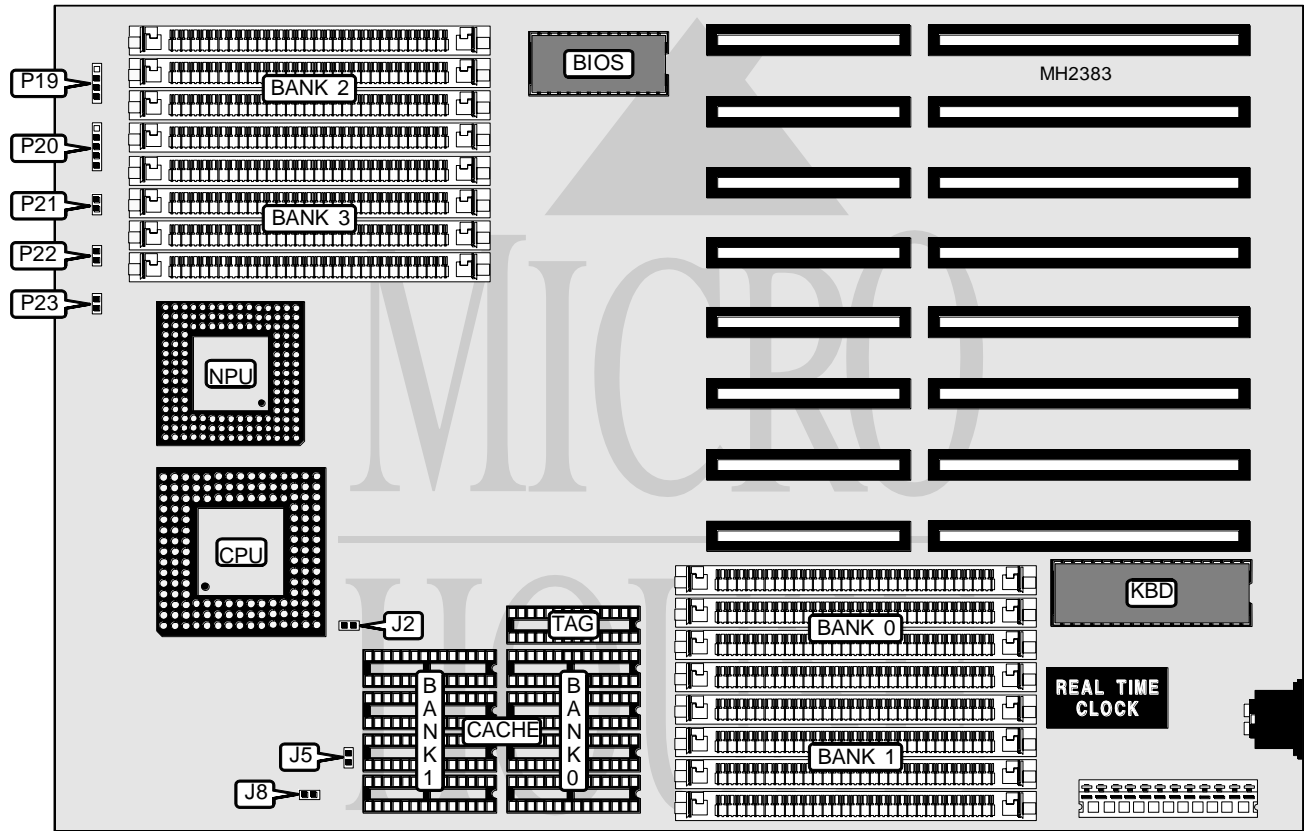

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	P19	Turbo LED	P22
Power LED & keylock	P20	Turbo switch	P23
Reset switch	P21		

Continued on next page. . .

YOUNG MICROSYSTEMS, INC.
VEGA MB-VS433S

... continued from previous page

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	NONE	NONE	NONE
2MB	(4) 256K x 9	(4) 256K x 9	NONE	NONE
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	NONE
4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE	NONE	NONE
8MB	(4) 1M x 9	(4) 1M x 9	NONE	NONE
9MB	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9	NONE
10MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE	NONE	NONE
32MB	(4) 4M x 9	(4) 4M x 9	NONE	NONE
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	NONE
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION			
Size	J2	J5	J8
64KB	Open	Open	Open
256KB	Closed	Closed	Closed